



MAXMEEN
أنظمة معالجة و حلول المياه
CARE WATER CARE YOU

منتجات تحلية المياه

منتجات تنقية المياه

منتجات تعقيم المياه

مرشحات

قطع غيار

ملحقات الأجهزة

Water Desalination Products

Water Filtration Products

Water Sterilization Products

Filter Cartridges

Spare Parts

Hardware Accessories



RoHS CE

مجموعة المنامين التجارية

Al-MANAMEEN TRADING GROUP

Manameen Trading Group was established in 1975 AD, where it started its first business in the field of buildings, sanitary, electrical and dye materials. After that, the group's activity was integrated, including the activity of electronics and householding devices. A pioneer in the region in the field of amplifiers and all audio related devices. The activities of water desalinations, treatments and purification devices were included as a sub-activity. The year of 1999 AD this activity developed until it became an independent section, an independent branches of this section. Our importing activities expended of the section. Our group won exclusive distribution contracts at several companies in the field, obtained exclusive agency contracts for several brands. Commercial and group's activity has developed until it obtained a registered trademark, **MAXMEEN**, where devices, equipment's and spare parts are manufactured specifically by the group, with the highest levels of international specifications and standards. Holding international quality certificates from several factories in the world, including Europe, America, Turkey, Taiwan, China, Malaysia and others.

-
- Br .Dammam (The main branch of Water desalination) Al Manameen water desalination, treatment solutions -
Al Jalawia, Prince Nayef Rd Tel. : +966138309005 Mob. : +966598309005
 - Br .Qatif Head office - building materials- saintary - eletricity - water treatment ,
Qatif,Imam Ali st. Tel.: +966138551178
 - Br. Al Manameen Water pumps , water desalination, treatment solutions -
Qatif,Imam Ali st. Tel.: +966138522286
 - Br. Electronics & houshold Equip. & Loud Speaker - Qatif , King Abdulaziz st Tel. : +966138511802
 - Br. Al Majeediah Al Quds st Tel.: +966138546322
 - Br. Al Turkiya Ohod st. beside Sceco Tel.: +966138232200
 - Br. Electronocs & sound system - Dammam , King Khalid st. Tel.: +966138304141



MAXMEEN




GRUNDFOS



PENTAIR



تأسست مجموعة المنامين التجارية عام 1975 م حيث استهلت باكورة أعمالها في مجال المواد الصحية والبناء و الكهرباء و الأصباغ. تكامل نشاط المجموعة بعد ذلك حيث أدرجت نشاط الأجهزة الإلكترونية و المنزلية و كانت سبقة في المنطقة في مجال أجهزة مكبرات الصوت و جميع متعلقات الصوتيات. و تم إدراج نشاط أجهزة التخلية و معالجة و تنقية المياه كنشاط فرعي من العام 1999م و تطور هذا النشاط حتى أصبح قسما "مستقلا" ثم فروع مستقلة لهذا القسم و توسع نشاط الاستيراد للمجموعة لهذا القسم و نالت المجموعة عقود توزيع حصرية لعدة شركات في هذا المجال و من ثم نالت المجموعة عقود وكالات حصرية لعدة علامات تجارية و تطور نشاط المجموعة حتى أصبح لها علامة تجارية مسجلة **MAXMEEN** حيث يتم تصنيع أجهزة و معدات و قطع غيار خصيصا" للمجموعة و على أعلى نسب في المواصفات و المقاييس العالمية و أصبحت تحمل شهادات جودة عالمية من عدة مصانع في العالم كالوروبا و أمريكا و تركيا و تايوان و الصين و ماليزيا و غيرها .

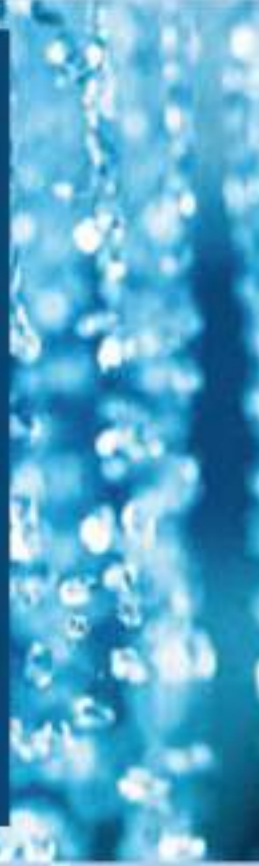

- فرع الدمام (التخلية رئيسي) المنامين للتخلية وحلول المياه

هاتف : 013-8309005 جوال : 0598309005 - الجلولية - شارع الأمير نايف

- المركز الرئيسي - القطيف - مواد بناء - صحية - كهرباء - معالجة مياه

القطيف - شارع الإمام علي - هاتف : 013-8551178

- فرع مواطير المياه و أنظمة محلية و معالجة المياه

القطيف - شارع الإمام علي - هاتف : 013-8522286

- فرع الالكترونيات و الأجهزة المنزلية و مكبرات الصوت

القطيف : شارع الملك عبد العزيز - هاتف : 013-8511802

- فرع المجيدية

شارع القدس - هاتف : 013-8546322

- فرع التركية :

شارع أحد ، بجوار سكيكو - هاتف : 013-8232200

- فرع الالكترونيات و الأجهزة الصوتية

الدمام - شارع الملك خالد - هاتف : 013-8304141



Scan Me

AQUAPRO

C.C.K.

Aqua-Pure

Clack

DOW
FILMTEC
MEMBRANES

Content



3-7

وحدات تحلية من 5 - 8 مراحل
من 50 جالون الى 800 جالون
R.O Water Purifiers from 5 - 8 Stage
50 - 800GPD



8

وحدات تحلية عالية الإنتاج مع
كبائن من 100 الى 800 جالون
Luxury Steel Box with cabins,
100 - 800GPD



9

وحدات تحلية عصرية ذكية
Smart R.O Systems



10

وحدات تحلية مدمجة مع مبردات
Water Dispensers with Purifiers



11-12

مبردات المياه الصغيرة (خزان داخلي)
Small Water Dispensers with Inner Tank



13

قوارير المياه للبرادات
Dispensers Holding Tank



14-16

محطات التحلية الصناعية
Industrial desalination plants



17-20

حاويات الفلاتر
Water Filters



21

فلاتر مياه الاستحمام
Shower Filters



22

فلاتر المياه المباشرة
Inline Filters



23-31

شمعات الفلاتر
Filter Cartridges



31

مواد الفلتر الطبيعية
Natural filter media



32

المواد الكيميائية و مواد اختبار المياه
Chemicals, and testing kits

الفهرس



أجهزة التبريد والتسخين
Heating and Cooling Devices

33-35



فلتر المياه الصناعية (الكبيرة)
Larg Industrial Filters

44



أغشية التناضح العكسي
Home / Industrial RO Membranes



حنفيات الأجهزة
Faucets
خزانات الضغط
Pressure Tanks

36-39



أجهزة تعقيم المياه
Ultraviolet Water Sterilizers

45



مضخات الحقن + مضخات الضغط
Dosing and Pressure Pumps

50-51



قطع غيار ومكونات
تجميع محطات التحلية
Spare parts and components
of desalination plants

41 - 40



حاويات الفاير جلاس + قطع الغيار
FRP Pressure Vessels + Spare parts

46



أجهزة التحكم للمضخات
Automatic Pumps Control

52-59



قطع غيار واكسسوارات متنوعة
Spare Parts and Accessories

42-43



حاويات الضغط لأغشية التناضح
Membranes pressure vessels

47



مضخات المياه
Water Pumps

54



أجهزة قياس واختبار المياه
Measuring Devices

Undersink R.O Water Purifiers

وحدات تحلية عالية الجودة "تحت المطبخ"



AP- 600P / AP-600

5/6 Stage RO system

- 10" sediment prefilter
- 10" GAC prefilter
- 10" carbon block prefilter
- RO membrane(50, 75, or 100GPD)
- Post inline GAC filter
- *Booster pump 110/220V, 50/60Hz (AP-600P)
- *Option: Anti-scalent filter
- Faucet & installation kit
- 4.4 gal. RO tank & ball valve
- Shipping dimension & weight:
- 50x40x49cm 13.4kgs
- 50x49x40cm 17kgs (AP-600P)



AP-600-UV1

7 Stage RO system w/pump

- 10" sediment prefilter
- 10" GAC prefilter
- 10" carbon block prefilter
- Booster pump 110/220V, 50/60Hz
- RO membrane(50, 75, or 100GPD)
- Post inline GAC filter
- Anti-scalent filter
- UV1GPM STERILIZER
- Faucet & installation kit
- 4.4 gal. RO tank & ball valve
- Shipping dimension & weight:
- 50x53x52cm 20kgs



AP-600P-ST

6 Stage RO system w/pump & stand

- 10" sediment prefilter
- 10" GAC prefilter
- 10" carbon block prefilter
- Booster pump 110/220V, 50/60Hz
- RO membrane(50, 75, or 100GPD)
- Post inline GAC filter
- *Option: Anti-scalent filter
- Faucet & installation kit
- 4.4 gal. RO tank & ball valve
- Shipping dimension & weight:
- 50x40x54cm 17.8kgs

Undersink R.O Water Purifiers

وحدات تحلية عالية الجودة "تحت المطبخ"



RO-50G/75G/80G/100G/125G-A01

Standard 5-Stage RO System with Pump

Manual Flush

RO Water Output :50GPD/75GPD/80GPD

100GPD/125GPD

Housing :122-10Y-W single "O" Ring Housing

Quick Fitting

Diaphragm Booster Pump with

Adaptor 110V/220V ,50/60Hz

NSF Certificated Hidrotek RO Membrane

Pressure Tank :3.2G Steel Tank or 3.0G Plastic Tank

Machine Dimension :360×145×440mm

Packing Dimension : 440×360×580mm



RO-200G/400G/600G-P01

High Flow ,without Tank

RO Water Output:200GPD/400GPD/600GPD

Quick Fitting

NSF Certificated Hidrotek RO Membrane

Machine Dimension :400×230×540mm

Packing Dimension : 420×415×465mm



RO-50G/75G/80G/100G/125G-D02

Manual Flush

RO Water Output :50GPD/75GPD/80GPD

100GPD/125GPD

Standing shelf and pressure guge

Housing :122-10Y-W single "O" Ring Housing

Quick Fitting

Diaphragm Booster Pump with


Adaptor 110V/220V ,50/60Hz

NSF Certificated Hidrotek RO Membrane

Pressure Tank :3.2G Steel Tank or 3.0G Plastic Tank

Machine Dimension :360×145×440mm

Packing Dimension : 440×360×580mm

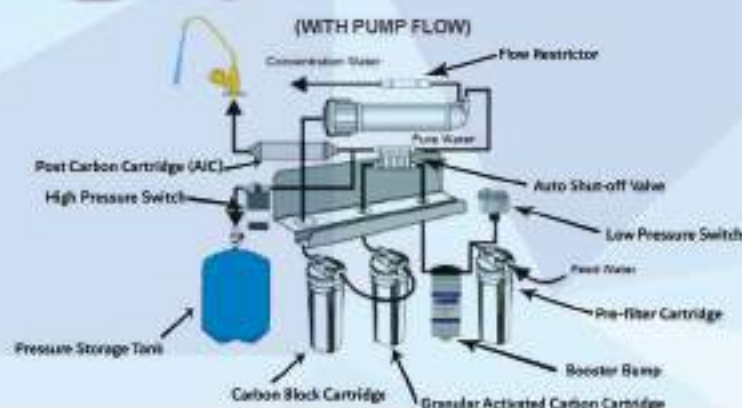

Undersink R.O Water Purifiers

وحدات تحلية عالية الجودة "تحت المطبخ"



7-Stage 75GPD with Stand



RO-75G-VEI 7 S

Sediment Filter 10"
Granular Carbon Filter 10"
Carbon Block Filter 10"
Membranes 75GPD USA
Inline Post Carbon
Inline Mineral Ball Filter
Inline Nano Silver
Booster Pump & Adaptor
Made In Veitnam
Storage Tank 4G
Faucet



6-Stage RO System 150GPD 10"



ARO-150G

Sediment Filter 10"
Granular Carbon Filter 10"
Carbon Block Filter 10"
Membranes 75x2GPD Taiwan
Inline Post Carbon
Inline Anti Scale
Booster Pump & Adaptor
Made In Taiwan



6-Stage Classic Pure 75GPD with Stand



FE-306

Sediment Filter 10"
Granular Carbon Filter 10"
Carbon Block Filter 10"
Membranes 75GPD Nittotic USA
Inline Post Carbon
Inline Alkaline
Pressure Tank Fiber 4G
Faucet
Made in Taiwan



6-Stage Classic Pure 75GPD



FE-106

Sediment Filter 10"
Granular Carbon Filter 10"
Carbon Block Filter 10"
Membranes 75GPD Nittotic USA
Inline Post Carbon
Inline Alkaline
Pressure Tank Fiber 4G
Faucet
Made in Taiwan

Compact Types 150-400Gpd

وحدات تحلية مدمجة عالية الانتاج من 150-400 جالون/اليوم



ARO-150G / 150G-N



MAXMEEN

20" 5 micron Prefilter
20" 1 micron Prefilter
20" Carbon block Prefilter
Anti-Sclent Prefilter
Booster Pump & Transformer
TFC R.O. membranes(75GPD*2)
Post Granular Carbon filter
High/Low Pressure Switch
Auto Shut-off Valve
Flow Restrictor
Faucet & Installation kit
Auto Flush Controller(option)
Solenoid Valve 3/8", 1/4"
Shipping Dimension & weight:
48X26X83cm 20kgs



ARO-200G / 200G-N



ARO-300G / 300G-N



MAXMEEN

20" 5 micron Prefilter
20" 1 micron Prefilter
20" Carbon block Prefilter
Anti-Sclent Prefilter
Booster Pump & Transformer *1 set,
*2 sets
TFC R.O. membranes(100GPD*2,*3)
Post Granular Carbon filter
High/Low Pressure Switch
Auto Flush Controller(option)
Solenoid Valve 3/8", 1/4"
Shipping Dimension & weight:
48X32X83cm 28kgs (ARO-200G)
48X32X83cm 28.3kgs (ARO-300G)



ARO-400G



ARO-400G-N



MAXMEEN

20" 5 micron Prefilter
20" 1 micron Prefilter
20" Carbon block Prefilter
Anti-Sclent Prefilter
Booster Pump & Transformer *2 sets
TFC R.O. membranes(100GPD*4)
Post Granular Carbon filter
High/Low Pressure Switch
Auto Flush Controller(option)
Solenoid Valve 3/8", 1/4"
Shipping Dimension & weight:
48X32X83cm 29kgs

Compact Types 200-600Gpd

وحدات تحلية مدمجة عالية الإنتاج من 200-600 جالون/اليوم

وحدات تحلية مدمجة عالية الإنتاج من 150-400 جالون/اليوم



5-Stages RO System with Steel Shelf



RO-200G/300G/400G/600G-D02B

Flush Type :Manual Flush
With steel shelf
Housing :122-10Y-W single "O" Ring Housing
RO Water Output : 200GPD/400GPD
Fitting Type :JACO
Diaphragm Booster Pump with
Adaptor 110V/220V ,50/60Hz
NSF Certificated Hidrotek RO Membrane
Pressure Tank :11G Steel Tank
Packing Dimension : 45.5×29×80cm

MAXIMIN



5-Stages RO System with Steel Shelf



RO-200G/400G-D01

Flush Type :Manual Flush
With steel shelf
Housing :122-10Y-W single "O" Ring Housing
RO Water Output : 200GPD/400GPD
Fitting Type :JACO
Diaphragm Booster Pump with
Adaptor 110V/220V ,50/60Hz
NSF Certificated Hidrotek RO Membrane
Pressure Tank :11G Steel Tank
Packing Dimension : 47×31×88cm

MAXIMIN



AP-400/800DIR-ST-UV1

Direct RO or UF system
6 Stage RO Dir UV system
10" sediment prefilter
10" GAC prefilter
10" carbon block prefilter
Booster pump 110/220V, 50/60Hz
RO membrane (3012, 400GPD)
Post inline GAC filter
Auto-flush controller & solenoid valve
UV1GPM Sterilizer
Faucet & Installation kit
48.5X26X54.5cm 16.8kgs

MAXIMIN

Steel Box 5-Stages RO System



RO-200G/400G-B06

On Board Computer
Auto Flush
Pressure Gauge
Housing:122-20Single "O" Ring Housing
RO Water Output:200GPD/400GPD
Fitting Type :JACO
Diaphragm Booster Pump wih Adaptor 110V/220V ,
50/60Hz
NSf Certificated Hidrotek RO Membrane
Pressure Tank:11G steel Tank
Packing Dimension:59×42×99mm

MAXMEEN

Luxury Steel Box RO System with Ic Controller



RO-100G/200G/400G/600G/800G-B07

On Board Computer
Auto Flush
Pressure Gauge
Housing:122-20Single "O" Ring Housing
RO Water Output:100GPD/200GPD/400GPD
600GPD/800GPD
Fitting Type :JACO
Diaphragm Booster Pump wih Adaptor 110V/220V , 50/60Hz
NSf Certificated Hidrotek RO Membrane
Pressure Tank:11G steel Tank
Machine Dimension: 600×600×970mm
Packing Dimension:610×610×1000mm

MAXMEEN

Luxury Steel Box System with Inner Tank



RO-100G/200G/400G/600G/800G-B08

On Board Computer
Auto Flush
Pressuer Gauge
Housing:122-20Single "O" Ring Housing
RO Water Output:100GPD/200GPD/400GPD
600GPD/800GPD
Fitting Type :JACO
Diaphragm Booster Pump wih Adaptor 110V/220V , 50/60Hz
NSf Certificated Hidrotek RO Membrane
Pressure Tank:11G steel Tank
Machine Dimension: 600×600×1600mm
Packing Dimension:670×670×1750mm

MAXMEEN

Smart R.O Systems

أجهزة التحلية العصرية الذكية



75GPD

6 STAGES 75 GPD BOX TYPE RO SYSTEM WITH LED SCREEN

Sediment Filter 10"
Granular Carbon Filter 10"
Carbon Block Filter 10"
Membranes 75 GPD
Inline Post Carbon – Coconut Carbon Filter
Inline Mineral Ball Filter
Booster Pump 24 V
Storage Tank 12 L
Faucet



BBR- RO-75D16

Power : 220V 50/60Hz
Inlet Water Pressure : 0.1Mpa-0.4Mpa
Pure Water Flow : 75GPD - 400GPD
Filter Cartridge : PP+UDF+RO+T33+Mineral
RO membrane ; Filmtec RO MEMBRANE
Tank Capacity : 5Gallon
LED display : Cartridge life + Working Process
Product Size : 41.5x16. 6x37cm
Carton Size : 40.5x22. 5x55cm

Direct flow R.O Systems

أجهزة التحلية المباشرة



AQB-600D/ AQB-400

Direct RO or UF system

NL-PP sediment prefilter
NL-AC gac prefilter
NL-CB carbon block prefilter
HP Booster pump 110/220V, 50/60Hz
Transformer 24V 3A
*RO membrane 400GPD*1 100GPD*1
RO mebrane 400GPD*1
*UF membrane 0.02u
Post inline filter
Solenoid valve
LCD Digit Flow monitor:
5 filter setting, 2000-10000L
Faucet & Installation kit
Machine: 20 x 40 x 40 cm
Shipping dimension & weight:
25x42.5x51cm, 18.5kgs



BBR-RO-50D18

Pure Water dispenser with RO system

Features:

- 6-stage filtration
- With large LCD display screen
- With hot & cold water
- Pure water tank: 5 L
- Hot water tank: 1.1 L
- Cold water tank: 4 L
- Cooling by compressor
- With Safety lock, it can lock the hot water button
- With nice cabinet
- power: 220-240V 50/60Hz 90-110w
- Unit Packing Dimension: 62X37X63.5cm

Luxury Stainless steel Water Dispenser with R.O System

RO DRINKING WATER DISPENSER WITH BIG CAPACITY



RO-200G/300G/400G-L01

- With Ic Controller
- LCD Screen Accurately Display Hot & Cold Water
- Fitting Type :Quick Fitting
- Electricity Leakage Protection
- Heating by EGO
- With Hot , pure , cool water
- Hot Water Tank : 5L
- Pure Water Tank : 25L
- Cool Water Tank : 3L
- Water Output : 200GPD/300GPD/400GPD
- NSFCertificated Hidrotek RO Membrane
- Machine Dimension : 50x58x150cm



Water Dispensers with inner Tanks

مبردات الماء مع خزان داخلي



GX-2-5-98TB

compressor Cooling Without filters
With hot, pure, cold water
Pure water tank: 5 L
Hot water tank: 1.5 L
Cold water tank: 3 L
Cooling by compressor
With Safety lock, it can lock the hot water button
With nice cabinet
power: 220-240V 50/60Hz
Unit Packing Dimension: 37X33X52cm



GX-33TB

compressor Cooling Without filters
With hot, pure, cold water
Pure water tank: 5 L
Hot water tank: 1.5 L
Cold water tank: 3 L
Cooling by compressor
With Safety lock, it can lock the hot water button
With nice cabinet
power: 220-240V 50/60Hz
Unit Packing Dimension: 37X33X52cm

Water Dispensers with inner Tanks

مبردات الماء مع خزان داخلي


MAXMEEN



XJM-16ET

compressor Cooling Without filters
With hot & cold water
Pure water tank: 5 L
Hot water tank: 1.5 L
Cold water tank: 3 L
Cooling by compressor
With Safety lock, it can lock the hot water button
With nice cabinet
power: 220-240V 50/60Hz 90-110w
Unit Packing Dimension: 33X36X52cm



YLR-LW-2-5-24TB

compressor Cooling Without filters
Features: Hot , Warm & Cold
Rated Voltage/Frequency: AC220V-240V~50/60Hz
Hot water tank 1L
Cold water tank 3L
Cooling by compressor
With Safety lock, it can lock the hot water button
With nice cabinet



Dispensers Holding Tank

قوارير برادات المياه المباشرة



DPT-001

RO Water Holding
Tank for Water Dispenser

Capacity :4L

Packing Dimension:405×405×410mm/8pcs



DPT-002

RO Water Holding
Tank for Water Dispenser

Capacity :8L

packing Dimension :540×530×450mm/8pcs

Connect to RO system



Usage:

- Remove water bottle and holder.
- Install Dispenser Holding Tank.
- Connect Tank to RO unit.

300GPD-1000GPD

ARO-300G-2

ARO-600G-2



ARO-300G-2/ARO-600G-2

S.steel frame
20" Prefilters x 3
S.steel Membrane vessel (*2)
2.5" x 21" membrane (*2)
Inlet & Flush Solenoid Valve
Gauge & Flow meter
125gph vane pump & 1/2hp motor
Auto Flush Controller
Pressure Regulator
Anti-scalent device
Electricity consumption: 392W
Shipping Dimension & weight:
48X60X72cm 35kgs (300G-2)
48X60X72cm 36kgs (600G-2)

ARO-800G/800G-C



ARO-800G/ARO-800G-C

S.steel frame Control Box-Option)
20" Prefilters x 3
S.steel Membrane vessel
4" x 21" membrane
Inlet & Flush Solenoid Valve
Gauge & Flow meter
240gph vane pump & 1hp motor
Auto Flush Control & TDS detector
Pressure Regulator
Anti-scalent device
Electricity consumption: 764W
Shipping Dimension & weight:
50X80X116cm 60kgs

1500GPD-3000GPD

ARO-1500G



S.steel frame (Control box-Option)
20" Prefilters x 3
S.steel or Fiber Glass Membrane vessel
4" x 40" membrane
Inlet & Flush Solenoid Valve
Source & Ro Gauge
Inlet & Concentration Flow meter
240gph vane pump & 1hp motor
Vertical Pump 1.1kw (ARO-1500G-VP)
Auto Flush Control & TDS detector
Pressure Regulator
Anti-scalent device
Electricity consumption: 764W
Shipping Dimension & weight:
80X50X145cm 65kgs

SMN : 1500



Pure water Out-Put : 1500GPD
RO-Membrane : 4040*1, FILMTEC
Pump Power : 1.5KW
Recovery : 15%
Filter : 20"PP10um & CTO
Flow Meter : RO Membrane &
RO Concentrate
Disply : Total Dissolved Solids
(TDS) PPM
Voltage : 380V , 50/60Hz, 3PHASE
Controller : Automatic Controller
Pressure Gauge : Source-Inlet &
CNP Pump pressure & RO Concentrate
Dimension (L*W*H cm) : 75x75x185

ARO-3000G



S.steel frame (Control box-Option)
20" Prefilters x 3
S.steel or Fiber Glass Membrane vessel
4" x 40" membrane*3
Inlet Actuator & Flush Solenoid Valve
Source & Ro Gauge
Inlet & Concentration Flow meter
S.steel Vertical Pump 2.2kW
(single phase motor)
Auto Flush Controller & TDS detector
Pressure Regulator
Gate Valve
Anti-scalent device*2
Electricity consumption: 2220W
Shipping Dimension & weight:
80X50X145cm 88kgs



Industrial desalination plants

محطات التحلية الصناعية

Industrial desalination plants customized-made from
100M³/d to 1500M³/D

محطات تحلية صناعية تصنع حسب الطلب
من 100 م³/اليوم الى 1500 م³/اليوم



We provide , Import and manufacture all types of high-production desalination plants from 100m³ to 1500m³/D that treat varios types of water

* Prices and specifications are according to the project requirements

نقوم بتوفير و استيراد و تصنيع جميع أنواع محطات تحلية المياه عالية الإنتاج من 100 م³ إلى 1500 م³/اليوم و التي تعالج مختلف أنواع المياه .

* الأسعار والمواصفات حسب متطلبات المشروع



* Ready to inport and manufacture everything related to water and beverage factories from puification - desalination - sterilization - packaging.

According to the required specifications and sizes

* على استعداد لتوريد و تصنيع جميع ما يتعلق بمصانع المياه والمشروبات من تنقية - تحلية - تعقيم - تعبئة وتغليف على حسب المواصفات والمقاسات المطلوبة

Water Filters

فلتر المياه



Single Filter

- US-1**
 10" Disposable Cartridge
 (PP 1u , PP 5u , GAC ,
 or CTO Available)
 Packing Daimension :
 580×355×370mm/8pcs



Double Filter

- US-2**
 10" Disposable Cartridge
 - PP 5u + CTO
 (PP 1u and GAC Available)
 Packing Daimension :
 580×305×370mm/4pcs



Triple Filter

- US-3**
 10" Disposable Cartridge
 PP 5u + GAC + CTO
 (PP 1u Available)
 Packing Daimension :
 580×420×370mm/4pcs



Four Stages Filter

- US-4**
 US-3 _T33I(Iodized Resin)
 or UV-6
 Packing Dimension:
 570×425×385mm/4pcs



Five Stages Filter

- US-5**
 US-3 _T33I(Activated
 Carbon) + T33I(Iodized
 Resin) or UV-6
 Packing Dimension:
 625×440×440mm/4pcs



Master Water Filters



- WF-10B2**
 10" Big blue Cartridge
 (PP+CTO)
 Packing Dimension:
 405×230×580mm



- WF-10B3**
 10" Big blue Cartridge
 (5umPP+CTO +1umpp)
 Packing Dimension:
 600×230×580mm



- WF-20B2**
 20" Big blue Cartridge
 (PP+CTO)
 Packing Dimension:
 405×230×825mm



- WF-20B3**
 20" Big blue Cartridge
 (5umPP+CTO +1umpp)
 Packing Dimension:
 600×230×825mm

10" OR 20" SYSTEM 1/2" - 3/4" - 1"



AHS3-TWIN

10" AHS3 housing x2 (1/2" or 3/4")
Cartridge: refer to p25-26



AQF-TWIN

AQF housing x2 (3/8"-3/4")
10" AQF housings
Cartridge: refer to p25-26



AQFBB-TWIN

10" or 20" Big blue twin
system w/ gauges
In/outlet: 1", 1-1/4", 1-1/2"
Sediment & Carbon Block filters



AQFBB-TWIN3

10" or 20" BB Twin system
w/ Stand & Gauges
Sediment &
Carbon Block filters



Single Filter



Doble Filter



Triple Filter



NW-1

10" Disposable Cartridge
(PP 1u, PP 5u GAC,
or CTO Available)
packing Dimension :
208×145×360 mm



NW-1

10" Disposable Cartridge
- PP 5u + CTO,
(PP 1u and GAC Available)
packing Dimension :
345×145×360 mm



NW-1

10" Disposable Cartridge
PP 5u + GAC + CTO
(PP 1u Available)
packing Dimension :
450×145×360 mm

Filter Housings

حاويات فلاتر المياه



124-10

10" Single O-Ring
Jambo Blue Housing
3/4", 1", 1.25", 1.5" Plastic or Brass Port
Black cap with Pressure Relief
Packing Dimension : 43x43x39cm/4pcs



122-10W-1

10" Single o-Ring
White Housing
1/4" Plastic Port
White Cap
Packing Dimension : 47x36x33cm/12pcs



122-10S-a

10" Single O-Ring
Clear Housing
1/4" Plastic Port
White Cap
Packing Dimension : 47x36x33cm/12pcs



122-10N-S01

10" Single O-Ring
Clear Housing
1/2", 3/4", 1" Brass Port or 1/2", 3/4" Plastic Port
Black Cap
Packing Dimension : 53x40.5x34cm/12pcs



122-10N-L01

10" Single O-Ring
Blue Housing
1/2", 3/4", 1" Brass Port or 1/2", 3/4" Plastic Port
Black Cap
Packing Dimension : 53.5x40x34cm/12pcs



121W-10

10" Single O-Ring
White Housing
1/2", 3/4", 1" Brass Port or 1/2", 3/4" Plastic Port
White Cap with Pressure Relief
Packing Dimension : 53.5x40x33cm/12pcs



S.Steel Housing
10" & 20" S.Steel 316
Filter Housing



AF-SS-10 **AF-SS-20**

Item no.	In/outlet
AF-SS-10	3/4", 1" PT
AF-SS-20	3/4", 1" PT

Membrane Housing
Side port membrane housing



MH-3012 **MHKP11135**

Item no.	In/outlet
MHKP11135	1/8"
MH-3012	1/4"

table.1



table.2



Item no .	In/outlet
122-20S	3/8", 3/4" , 1" Plastic or Brass Port
122-20	3/8" , 1/2" ,1" Plastic or Brass Port
124-20	3/4",1",1.25",1.5"Plastic or Brass Port
AQF-2040C	3/8" , 1/2" , 3/4" NPT
AQF-2040	3/8" 1/2" , 3/4" NPT

*table.1

Item no .	In/outlet
AQF-1050	1",1 1/4" ,1 1/2"NPT or BSP
AQF-2050	1",1 1/4" ,1 1/2"NPT or BSP
AQF-1050C	1",1 1/4" ,1 1/2"NPT or BSP
AQF-2050C	1",1 1/4" ,1 1/2"NPT or BSP

*table.2

Shower Filters

فلتر مياه الاستحمام



Chlorine



Available colors



Colour Box

Shower Head

Item No : SFH-01

FILTER MEDIA

1. Calcium Sulfite & Vitamin C Balls

2. Negative Ion Balls

3. Germanium Balls

Packing Dimension : 540x440x310mm/25pcs

Benefit:

Eliminates chlorine in water supply to keep skin and hair healthy .

Vitamin C is released during the showering promoting healthier skin .

Far infrared is released to improve water's dissolving and cleaning properties .

Usage :

1. Ensure hose is the correct size for new shower head before proceeding with installation

2. Remove old shower head and connect new shower head to hose

3. Recommended Filter replacement interval is 3-6 months depending on usage .



Shower Filters



MK-808

MK-810



MK-808 / MK-810

- Magnetic wave
- Energized shower feel
- With 6 filtration media
- 1/2" male & female in/outlet
- Various color or clear case



SF-02G

- Calcium Sulfite , KDF , Magnet
- Activated Ceramic Ball
- Packing Dimension : 420x420x370cm/50pcs
- (SF-02G)





Filtration and Function :

- Remove sand, silt and rust particles in water
- Solve the problem of secondary pollution in the distribution of city water pipeline network and turbidity of water in rural ground water .
- Siliphos Cartridge for option : Prevents "brown" or "red" water and clogged pipes, keeps pipe work clean.

- *High Filtration Precision*
- *Excellent Performance*
- *Simple Structure*
- *Easy Operation*

Parameter

Model No	PRF-01
Water source	City water
Suitable pressure	1bar~8bar
Water flow	1000L/H
Water inlet	1/2 inch
Purified water output	1/2 inch
Drain outfall	1/2 inch
Filtration precision	40~90 um
Rating temp	5~45°C
Packing Dimension	215x115x100mm

Installation Diagram



Filtration and Function :

- Remove sand, silt and rust particles in water.
- Solve the problem of secondary pollution in the distribution of city water pipeline network and turbidity of water in rural ground water .

- *High Filtration Precision*
- *Excellent Performance*
- *Simple Structure*
- *Easy Operation*

Parameter

Model No	PRF-02
Water source	City water
Suitable Pressure	1bar~8bar
Water flow	$Q=2.4m^3/h(P=0.2bar)$ $Q=4.2m^3/h(P=0.5bar)$
Water inlet	1/2, 3/4, 1 inch (DN20-25)
Purified water output	1/2, 3/4, 1 inch (DN20-25)
Drain outfall	1/2 inch
Filtration precision	40~90 um
Rating temp	5~45 °C
Packing Dimension	240x140x90mm

Installation Diagram



Filter Cartridges

شمعات الفلاتر

Carbon Block Cartridges

APC-05	5" Type
APC-10	10" Type, 1/5/10 micron
APC-20	20" Type
APC-1045	10" Big Blue Type
APC-2045	20" Big Blue Type



PP Spun Fiber Cartridges

PPS-05	5" Type
PPS-10	10" Type
PPS-20	20" Type
PPS-30	30" Type
PPS-40	40" Type
PPS-50	50" Type
PPS-1045	10" Big Blue Type
PPS-2045	20" Big Blue Type
PPS-05	1/5/10/25micron
PPS-10	1/5/10/25micron
PPS-20	1/5/10/25micron
PPS-30	1/5/10/25micron
PPS-40	1/5/10/25micron
PPS-50	1/5/10/25micron
PPS-1045	1/5/10/25micron
PPS-2045	1/5/10/25micron



PP String Wound Cartridges

SWS-05	5" Type
SWS-10	10" Type
SWS-20	20" Type
SWS-30	30" Type
SWS-40	40" Type
SWS-1045	10" Big Blue Type
SWS-2045	20" Big Blue Type
SWS-05	1/5/10/25/50micron
SWS-10	1/5/10/25/50micron
SWS-20	1/5/10/25/50micron
SWS-30	1/5/10/25/50micron
SWS-40	1/5/10/25/50micron
SWS-1045	1/5/10/25/50micron
SWS-2045	1/5/10/25/50micron

Residential & Industrial Type



Filter Cartridges

شمعات الفلاتر



Genuine Coconut Shell Granular Activated Carbon Cartridge

UPF-05	5" Type
UPF-10	10" Type
UPF-20	20" Type
GAC-1045	10" Big Blue Type
GAC-2045	20" Big Blue Type

Other media:

KDF, Silver Carbon, Polyphosphate



UPF-20

UPF-10

UPF-05

GAC-2045

GAC-1045

PP Pleated Cartridge

PET Pleated Cartridge, High Flow Selection

APP-10	10" Type
APP-20	20" Type
APP-1045	10" Big Blue Type
APP-2045	20" Big Blue Type
APP-10	1/5/10/25micron
APP-20	1/5/10/25micron
APP-1045	1/5/10/25/50micron
APP-2045	1/5/10/25/50micron

PP Pleated Cartridge

POLYRAY-10	10" Type, 0.2micron
POLYRAY-20	20" Type, 0.2micron



APP-20

APP-10

APP-2045

APP-1045

POLYRAY-20

POLYRAY-10

PP Grooved Cartridge

GAC & GAC-Sediment

Ceramic Types



APL-10
5u, 10" type

APS-10
5u, 10" type



GAC-S
GAC/Sediment

SWC-10
String wound/GAC
*Other media available



S-10
10" or 20"
0.9u or 5u

S-10C
0.9u, filled with
GAC

ANTI-SCALE ITEMS

RO or filtration

Piping

Heater, Colling Tower, Washing Maching



AIH / P808-S

Anti-scale filter
1/4" Female,
Flow rate : 5LPM
Service life: 1year
*AIH: Magnetic treatment
*P808-s: Fooddegree media



WI-34

Water Improver
3/4" male BSP
Flow rate : 6GPM
Service life : 5 years
*Anti-scale copper alloy



P808-34

Polyphosphate filter
3/4" Male & Female
Food degree material
Flow rate: 10GPM
Service life: 1year
*Patented design - No jam



PP Spun Fiber

PP-10-X 10" PP Spun Fiber Cartridge Packing Dimension 33x33x53cm/50pcs*	PP-10-T 10" PP Spun Fiber Cartridge Packing Dimension 33x33x53cm/50pcs*	PP-10B 10" PP Spun Fiber Cartridge For Big Blue Housing Packing Dimension 59x24x53cm/20pcs*
PP-5 5" PP Spun Fiber Cartridge Packing Dimension 34x34x54cm/100pcs*	PP-10 10" PP Spun Fiber Cartridge Packing Dimension 33.5x33.5x53cm/50pcs*	PP-20 20" PP Spun Fiber Cartridge Packing Dimension 33x32x53cm/25pcs*
PP-20B 20" PP Spun Fiber Cartridge For Big Blue Housing Packing Dimension 59x24x53cm/10pcs*	PP-30 30" PP Spun Fiber Cartridge Packing Dimension 33x33x77cm/25pcs*	PP-40 40" PP Spun Fiber Cartridge Packing Dimension 33x33x102cm/25pcs*



Granular Carbon Cartridge

GAC-10 10" Granular Carbon Cartridge Packing Dimension 39x39x28cm/25pcs*	GAC-10S 10" Granular Carbon Cartridge Packing Dimension 39x28x53cm/40pcs*	GAC-103 10" Granular Carbon Cartridge Packing Dimension 39x39x28cm/25pcs*
GAC-104 10" Granular Carbon Cartridge Packing Dimension 39x39x28cm/25pcs*	GAC-10B 10" Granular Carbon Cartridge For Big Blue Housing Packing Dimension 36x25x53cm/12pcs*	GAC-10E 10" Granular Carbon Cartridge Packing Dimension 39x39x28cm/25pcs*
GAC-102 10" Granular Carbon Cartridge Packing Dimension 40x30x26cm/20pcs*	GAC-20B 20" Granular Carbon Cartridge For Big Blue Housing Packing Dimension 36x25x53cm/6pcs*	GAC-20 20" Granular Carbon Cartridge Packing Dimension 53x39x31cm/20pcs*
GAC-20S 20" Granular Carbon Cartridge Packing Dimension 39x33x65cm/20pcs*	GAC-202 20" Granular Carbon Cartridge Packing Dimension 53x39x31cm/20pcs*	GAC-5 5" Granular Carbon Cartridge Packing Dimension 39x39x28cm/50pcs*



Block Carbon Cartridge

CTO-10 10" Block Carbon Cartridge Packing Dimension 38x38x28cm/25pcs*	CTO-4 4" Block Carbon Cartridge Packing Dimension 38x38x20cm/25pcs*
CTO-10B 10" Block Carbon Cartridge For Big Blue Housing Packing Dimension 36x25x53cm/12pcs*	CTO-5 5" Block Carbon Cartridge Packing Dimension 38x38x28cm/25pcs*
CTO-20 20" Block Carbon Cartridge Packing Dimension 53x39x31cm/20pcs*	CTO-7 7" Block Carbon Cartridge Packing Dimension 38x38x30cm/25pcs*
CTO-20B 20" Block Carbon Cartridge For Big Blue Housing Packing Dimension 36x25x53cm/6pcs*	



PP Yarn Cartridges

PS-5 5" PP Yarn Cartridge Packing Dimension 33x33x53cm/100pcs*	PS-30 10" PP Yarn Cartridge Packing Dimension 33x33x53cm/50pcs*	PS-20B 10"PP Yarn Cartridge For Big Blue Housing Packing Dimension 59x24x53cm/20pcs*	PS-20 20" PP Yarn Cartridge Packing Dimension 33x32x53cm/25pcs*
PS-10B 20" PP Yarn Cartridge For Big Blue Housing Packing Dimension 59x25x53cm/10pcs*	PS-10 30" PP Yarn Cartridge Packing Dimension 33x33x77cm/25pcs*	PS-40 40"PP Yarn Cartridge Packing Dimension 33x33x102cm/25pcs*	



Pleated Cartridges

PL-10 10" Pleated Cartridge Packing Dimension 33x33x53/50pcs*	^① PL-10B01 10" Pleated Cartridge For Big Blue Housing Packing Dimension 39x39x53/18pcs*	^② PL-101 10" Pleated Cartridge Packing Dimension 39x39x53/50pcs*
^③ PL-10B 10" Pleated Cartridge For Big Blue Housing Packing Dimension 39x39x53/18pcs*	^④ PL-20 20" Pleated Cartridge Packing Dimension 33x33x53/25pcs*	^⑤ PL-20B 20" Pleated Cartridge For Big Blue Housing Packing Dimension 39x39x53/9pcs*



Mic Pleated Cartridges

^① MIC-10S 10" MIC Pleated Cartridge Packing Dimension 39x39x28/25pcs*	^② MIC-101 10"MIC Pleated Cartridge Packing Dimension 39x39x28/25pcs*	^③ MIC-102 10"MIC Pleated Cartridge Packing Dimension 39x39x28/25pcs*
^④ MIC-10R 10" MIC Pleated Cartridge Packing Dimension 39x39x28/25pcs*	^⑤ MIC-10 10"MIC Pleated Cartridge Packing Dimension 39x39x28/25pcs*	^⑥ MIC-20R 20" MIC Pleated Cartridge Packing Dimension 38x38x53/25pcs*
^⑦ MIC-20 20"MIC Pleated Cartridge Packing Dimension 38x38x53/25pcs*		

Filter Cartridges

شمعات الفلاتر



CE-101
10" Grooved Cartridge
Grooved By Cutter
Packing Dimension:
33x33x53cm/50pcs



PUDF-101
10" PP Spun Fiber and
Granular Carbon Cartridge
Packing Dimension:
38x38x28cm/25pcs



PUDF-102
10" PP Spun Fiber and
Granular Carbon Cartridge
Packing Dimension:
38x38x28cm/25pcs



ION-101
10" Resin Filter Cartridge
Packing Dimension:
39x39x38cm/25pcs



ION-20
20" Resin Filter Cartridge
Packing Dimension:
53x53x39x32cm/20pcs



ION-102
10" Resin Filter Cartridge
Packing Dimension:
38x38x28cm/25pcs



ION-102(C)
10" Activated Carbon
Filter Cartridge
Packing Dimension:
38x38x28cm/25pcs



FR-10
10" Carbon Fiber Cartridge
Packing Dimension:
33x38x38cm/25pcs



CE-101
10" Ceramic Filter
Packing Dimension:
50x34x25cm/40pcs



CE-103
10" Ceramic Filter
Packing Dimension:
33x28x53cm/20pcs



SE-104
10" Ceramic Filter
Packing Dimension:
49x31x32cm/40pcs



SP-10
10" Silphos Cartridge
Packing Dimension:
38x38x28cm/25pcs



SFC-10
10" Net Filter Cartridge
Packing Dimension:
33x33x53cm/50pcs



SFC-5
5" Net Filter Cartridge
Packing Dimension:
33x33x53cm/100pcs



PH-10
PH Filter Cartridge
Packing Dimension:
33x28x53cm/40pcs



T-33P
PP sediment

Packing dimension:
27x27x27cm/25pcs



T-33C
Activated Carbon

Packing Dimension:
27x27x27cm/25pcs



T-33T2
Mineral Ball

Packing Dimension:
27x27x27cm/25pcs



T-33Q
Quick Fitting
Activated Carbon
Packing Dimension:
27x27x27cm/25pcs



T-33Q(A)
Quick Fitting
Alkaline mineralized balls
Packing Dimension:
27x27x27cm/25pcs



T-33
Activated Carbon

Packing Dimension:
27x27x27cm/25pcs



T-33M
Magnet Inside



T-33S
Acid-washed Block Carbon
Packing Dimension:
29x29x29cm/25pcs



T-33T3
Activated Carbon
With Argentum
Packing Dimension:
27x27x27cm/25pcs



T-33T1
Mineral Stone
Packing Dimension:
27x27x27cm/25pcs



T-33E
Far Infrared Cartridge
Packing Dimension:
29x29x29cm/25pcs



T-33F1
Far Infrared Cartridge
Packing Dimension:
39.5x39.5x33cm/25pcs



T-22B
Activated Ceramic Ball
Packing Dimension:
29x29x29cm/25pcs

In-line Carbon Filters

فلتر الكربون



TASTE AND ODOR FILTERS

Select the high quality coconut shell carbon mesh, high absorbent index, lowest ash contents, healthy pH value.



 AIC-2

 AIC-25



 AIC-2SC

 AIC-25C

Silver carbon



 AIC-2S

 AIC-25S

6" L TYPE

GAC/POLYPHOSPHATE, against hard water deposits, with slow released Polyphosphate



 AIC-2P

 AIC-25P

INLINE GAC/KDF, restraint of bacteria's growth, remove heavy metal particles



 AIC-2K

 AIC-25K

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PH: 7.0-8.0, PIPE SIZE: 1/4" OR 3/8"
SERVICE LIFE: 1500GAL.(AIC-2)
SERVICE LIFE: 2500GAL.(AIC-25)
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 9KGS
(AIC-2, AIC-25C)
24PCS/CARTON/39x32x28cm 13.6KGS
(AIC-25, AIC-25SC)

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 6.5" (168mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 6.5" (168mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PH: 7.0-8.0, PIPE SIZE: 1/4" OR 3/8"
SERVICE LIFE: 750GAL.(AIC-2S)
SERVICE LIFE: 1000GAL.(AIC-25S)
SHIPPING PACKAGE:
60PCS/CARTON/39x31x27cm 12.5KGS(AIC-2S)
40PCS/CARTON/39x31x27cm 14KGS(AIC-25S)

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4" OR 3/8"
SERVICE LIFE: 1500GAL.(AIC-2P)
SERVICE LIFE: 2500GAL.(AIC-25P)
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 10.4KGS(AIC-2P)
AIC-2P AIC-25P 24PCS/CARTON/39x32x28cm 15KGS(AIC-25P)

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4" OR 3/8"
SERVICE LIFE: 1500GAL.(AIC-2K)
SERVICE LIFE: 2500GAL.(AIC-25K)
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 11KGS(AIC-2K)
24PCS/CARTON/39x32x28cm 15KGS(AIC-25K)

In-line 3 in 1 Types & Sediments

شمعات فلاتر متعددة

ANTI-NITRATES resin filter, CATION resin filter,
Mix-bed resin filter ...



⊗ ANIC-2

⊗ ANIC-25

MAXIMEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4" OR 3/8"
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 19.2KGS(ANIC-2)
24PCS/CARTON/39x32x28cm 13.5KGS(ANIC-25)

SEDIMENT/GAC, dual stage



⊗ AICS-2

⊗ AICS-25

MAXIMEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PH: 7.0-8.0
PIPE SIZE: 1/4" OR 3/8"
SERVICE LIFE: 1500GAL.(AICS-2)
SERVICE LIFE: 2500GAL.(AICS-25)
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 8.2KGS(AICS-2)
24PCS/CARTON/39x32x28cm 14KGS(AICS-25)

SEDIMENT/GAC/POLYPHOSPHATE, three in one



⊗ AIT-2

⊗ AIT-25

MAXIMEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4" OR 3/8"
SERVICE LIFE: 1500GAL.(AIT-2)
SERVICE LIFE: 2500GAL.(AIT-25)
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 10KGS(AIT-2)
24PCS/CARTON/39x32x28cm 13.5KGS(AIT-25)

INLINE SEDIMENT FILTER, multi-layer,
depth filtration, stops sand, dirt, and
other solid particles.



⊗ AIP-2

⊗ AIP-25

MAXIMEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
NOMINAL FILTRATION: 5 MICRON
PIPE SIZE: 1/4" OR 3/8"
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 6KGS(AIP-2)
24PCS/CARTON/39x32x28cm 10KGS(AIP-25)

Healthy Alkaliner & Energizer

شمعات فلتر قلوية / تنشيطية



ⓧ AIP-2S

ⓧ AIP-25S

6" L TYPE

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 6.5" (168mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 6.5" (168mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
NOMINAL FILTRATION: 5 MICRON
PIPE SIZE: 1/4"
SHIPPING PACKAGE:
60PCS/CARTON/28x28x27cm 12KGS(AIP-2S)
40PCS/CARTON/39x32x28cm 12KGS(AIP-25S)

Bio-ceramic ball and the natural herb stone,
vitalize and mineralize the drinking water



ⓧ AIM-2

ⓧ AIM-25

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4"
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 13.8KGS(AIM-2)
24PCS/CARBON/39x32x28cm 25KGS(AIM-25)

Bio-ceramic ball and the pH raising ball,
vitalize and alkalize the drinking water



ⓧ AIM-ALKA2

ⓧ AIM-ALKA25

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 10.5" (262mm+-2mm)
DIA: 2.5" (64mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4"
SHIPPING PACKAGE:
25PCS/CARTON/28x28x27cm 13.8KGS(AIM-ALKA2)
24PCS/CARBON/39x32x28cm 25KGS(AIM-ALKA25)

Refillable multi-energizer
multi elements gathered in one piece



ⓧ AIM-2E4M



ⓧ AIM-2E-ALKA

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4"
SHIPPING PACKAGE:
20PCS/CARTON/32x26x33cm 13KGS

MAXMEEN

DIA: 2.0" (52mm) LENGTH: 11" (280mm+-2mm)
MAX FLOW: 0.75GPM
MAX PRESSURE(PSI): 125PSI
MAX TEMPERATURE: 100 F
PIPE SIZE: 1/4"
SHIPPING PACKAGE:
20PCS/CARTON/32x26x33cm 13KGS

Filter Cartridges

شمعات الفلاتر

Packing Dimension :
368x368x302mm/25pcs



PP sediment
T-33B3



Resin
T-33B5



Coconut
T-33B6

MAXIMUM

SPECIFICATION

Flow Rate :0.75 GPM
Pressure Range :125Psi
Temperature :5-450C
Service Life :3000 GAL

10" or 20" Cartridge Container



UPF-E
10" & 20"
clear/white



10-E
10" & 20"
semi clear



1045-E
10" or 20" BB



طقم فلاتر لجهاز التحلية المنزلي Replacement Kit 3 Filters

- Polypropylene Filter
- Granular Activated Carbon Filter
- Block Carbon Filter

FILTER MEDIA

مواد الفلتر الطبيعية



حصى (12-16 م م)
GRAVEL 12-16mm



حصى (9-12 م م)
GRAVEL 9-12mm



حصى (6-9 م م)
GRAVEL 6-9mm



حصى (3-6 م م)
GRAVEL 3-6mm



رمل خشن (1-3 م م)
COARSE SAND 1-3mm



رمل ناعم (0.5-1.0 م م)
FINE SAND 0.5-1.0mm



حببات الكربون
GRAINLAR CARBON



بولي فوسفات
Poly Phosphat



كبسولات الملح المنقى
SALT CAPSULES



الراتنجيات
RESIN

Chemicals / Testing Kits

المواد الكيميائية / عدة اختبار الماء



ATLANTIC A50-3

REVERSE OSMOSIS MEMBRANE
ANTISCALANT MAXIMUM USED
LEVEL 7MG/L

مانع الترسب لأغشية التناضح العكسي
المستوى الأقصى المستخدم 7 م ج / لتر



AJ-15100

MEMBRANE ANTISCALANT
MAXIMUM USE / DOSE 5MG/L

مانع الترسب لأغشية التناضح العكسي
المستوى الأقصى المستخدم 5 م ج / لتر



CAUSTIC SODA 48% - 50%
الصودا الكاوية 48% - 50%



SODIUM HYPOCHLORITE
SOLUTION 10% - 12%

محلول هيبوكلوريت
الصوديوم 12% - 10%



SULFURIC ACID 98%
حمض الكبريتيك 98%



SODIUM METABISULPHITE
FOOD GRADE E-223

بيروكبريتيت (ميتايسلفيت) الصوديوم
درجة الطعام اي-223



Guardex Water testing kits



S.Steel Industrial Filters


فلتر المياه الصناعية "ستانلس ستيل"



*Working Pressure : 30-150psi (2-10kg/cm²)

*Working Pressure: 103-220psi(7-15kg/cm²)

*High pressure (Max.20kg)

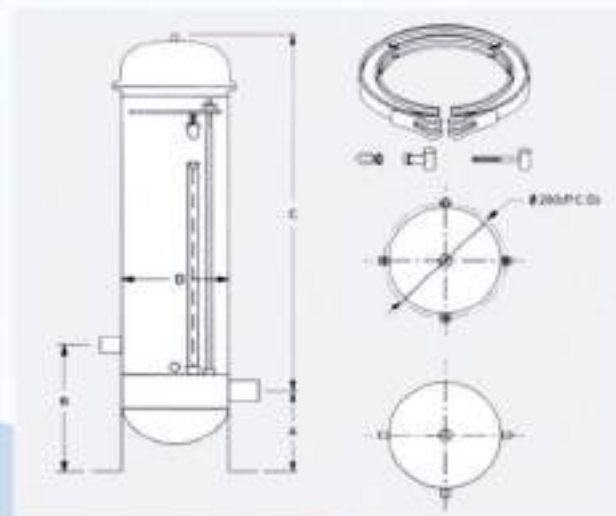

- * Flange in/outlet available
- * Housing Material:SS304, or SS316 on request.
- * Entire set of filter cartridges is removed at one time for cleaning replacement.
- * Working Temperature: 1~50°C

MODEL	A	B	C	D
CF-5/7	120	280	470	230
CF-10/14	120	280	770	230
CF-15/21	120	280	990	230
CF-20/28	120	280	1260	230

PART NO.	DESCRIPTION	PIPE SIZE(NPT)	DRAIN(NPT)	CARTRIDGES LOAD
CF05/05HP	230mm(D)x590mm(H)	1 1/2"	3/4"	10"x5
CF10/10HP	230mm(D)x890mm(H)	1 1/2"	3/4"	20"x5
CF15/15HP	230mm(D)x1110mm(H)	1 1/2"	3/4"	30"x5
CF20/20HP	230mm(D)x1380mm(H)	1 1/2"	3/4"	40"x5
CF07/07HP	230mm(D)x590mm(H)	1 1/2"	3/4"	10"x7
CF14/14HP	230mm(D)x890mm(H)	1 1/2"	3/4"	20"x7
CF21/21HP	230mm(D)x1110mm(H)	2"	3/4"	30"x7
CF28/28HP	230mm(D)x1380mm(H)	2"	3/4"	40"x7

* Made in Taiwan

S.Steel Bag Filters

فلتر المياه الصناعية "ستانلس ستيل"



MAXMEEN



AF-SS-BF

FLOW RATE: 20, 45, 90, 200GPM




AF-SS-BAG

Size: 1-4 Micron; 1u-200u



- * Flange in Loutlet available
- * Housing Material: SS304 , or SS316 on request
- * Working Temperature : 75°C
- * Working Pressure : 100psi (7kg/cm²)
- * Filter bag: Non-woven Fabric

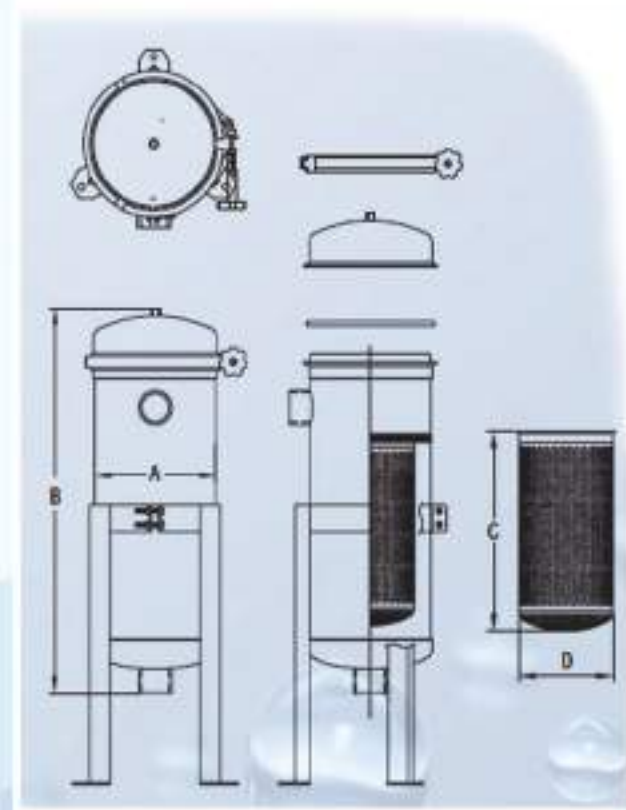

Model	A	B	C	D	Model	A	B	C	D
AF-SS-BF1	232	740	350	171.5	AF-SS-BF3	180	538	200	97.5
AF-SS-BF2	232	1195	730	171.5	AF-SS-BF4	180	673	310	97.5

Model	Flow	Weight	Volume	In/outlet	Shipping dimension
AF-SS-BF1	90GPM	21kg	27L	2"PT	370x370x800mm
AF-SS-BF2	200GPM	26kg	46L	2"PT	370x370x1200mm
AF-SS-BF3	20GPM	14kg	11L	1"PT	280x280x85mm
AF-SS-BF4	45GPM	15kg	14L	1"PT	280x280x85mm

Bag	Micron	Size (mm)	Bag	Micron	Size (mm)
AF-SS-BAG1	1u-200u	ø171.5xH419	AF-SS-BAG3	1u-200u	ø102xH229
AF-SS-BAG2	1u-200u	ø171.5xH813	AF-SS-BAG4	1u-200u	ø102xH381

Industrial Filters

فلاتر المياه الصناعية

Micro Filters



A: Inside diameter B: Total length
C: Height from inlet center to ground
E: Distance between feet

Stainless Steel Micro Filter

Items No.	Filter Cartridge Nos.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Theoretical thickness (mm)	Inlet (mm)	Outlet (mm)	Remark
170*250	3	170	450	180	75	245	1.5	25	25	Backwashing type
170*500	3	170	700	180	75	245	1.5	25	25	Backwashing type
170*750	3	170	950	180	75	245	1.5	40	40	Backwashing type
170*1000	3	170	1200	180	75	245	1.5	40	40	Backwashing type
200*250	5	200	450	180	75	245	1.5	40	40	Backwashing type
200*500	5	200	700	180	75	245	1.5	40	40	Backwashing type
200*750	5	200	950	180	75	245	1.5	40	40	Backwashing type
200*1000	5	200	1200	180	75	245	1.5	50	50	Backwashing type
250*500	7	250	700	350	150	306	1.5	50	50	Flange type
250*750	7	250	950	350	150	306	1.5	50	50	Flange type
250*1000	7	250	1200	350	150	306	1.5	50	50	Flange type
300*500	10	300	700	350	150	356	1.5	50	50	Flange type
300*750	10	300	950	350	150	356	1.5	50	50	Flange type
300*1000	10	300	1200	350	150	356	1.5	50	50	Flange type
350*750	15	350	1100	350	150	406	2	65	65	Flange type
350*1000	15	350	1350	350	150	406	2	65	65	Flange type
400*750	18	400	1100	350	150	456	2	65	65	Flange type
400*1000	18	400	1350	350	150	456	2	65	65	Flange type
500*1000	24	500	1450	450	200	556	2.5	80	80	Flange type
600*1000	32	600	1450	450	200	656	3	80	80	Flange type
700*1000	55	700	1550	450	200	756	3	100	100	Flange type
800*1000	88	800	1550	450	200	856	3	120	120	Flange type

* Made in China

UPVC Micro Filters



Type	Material	Size	Cartridges per	Cartridges Size	In/Out (mm)	Max pressure
HPCF-SDC1 HPCF-SDC1	UPVC	10"	5/3	Ø125-H465	Dn40/ANSI	A=0.4MPa
HPCF-SDC1 HPCF-SDC2		20"		Ø125-H715	1.5"(W=363)	
HPCF-SDC1 HPCF-SDC3		30"		Ø125-H965	Dn50/ANSI 2"	B=0.6MPa
HPCF-SDC1 HPCF-SDC4		40"		Ø125-H1215	(W=473)	
HPCF-SDC2 HPCF-SDC2	UPVC	20"	5/8	Ø115-H745	DN80/ANSI 3"	C=0.8MPa(80PSI)
HPCF-SDC3 HPCF-SDC3		30"		Ø115-H995		
HPCF-SDC4 HPCF-SDC4		40"		Ø115-H1245		

Ultraviolet Water Sterilizers

أجهزة تعقيم المياه بالأشعة فوق بنفسجية



6-12GPM UV STERILIZER - HORIZONTAL TYPE



☒ **UV6GPM-H**



☒ **UV12GPM-H**



☒ **UV12GPM-HT**



☒ **UV12GPM-HTM**

STANDARD SPECIFICATION

DIEMENSION L x W x D (mm)	560x80x80
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	6GPM
IN/OUT PORT	1/2"
UV LAMP (PC)	1
QUARTZ SLEEVE (PC)	1
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C(36-104°F)
LAMP WATTS	24W
CHAMBER	SS304

STANDARD SPECIFICATION

DIEMENSION L x W x D (mm)	900x170x88(UV12GPM-H) 900x190x160(UV12GPM-HTM)
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	12GPM
IN/OUT PORT	3/4"
UV LAMP (PC)	1
QUARTZ SLEEVE (PC)	1
LAMP FAILURE DEVICE	0
AMBIENT TEMPERATURE	2-40°C(36-104°F)
LAMP WATTS	40W
CHAMBER	SS304
ACCUMULATED TIMER	UV12GPM-HT, UV12GPM-HTM
UV LIGHT MONITOR	UV 12GPM-HTM

BIG BLUE FILTRATION PLUS 6-12GPM STERILIZER - VERTICAL TYPE



Big Blue housing
1"NPT/BSP
NSF PP & CB
UV6gpm, UV12gpm
Ballast & timer
Pressure gauge
Connectors
Shipping dimention:
68x22x48cm 18kgs
68x22x94cm 20.5kgs

☒ **AQFBB10-TWIN-UV6HT1**
☒ **AQFBB20-TWIN-UV12HT1**

DIEMENSION L x W x D (mm)	681x188x48 (6GPM) 681x188x94 (12GPM)
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	6GPM, 12GPM
IN/OUT PORT	1/2" (6GPM) 3/4" (12GPM)
UV LAMP (PC)	1
QUARTZ SLEEVE (PC)	1
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C(36-104°F)
LAMP WATTS	30W (6GPM) 40W (12GPM)
CHAMBER	SS304
ACCUMULATED TIMER	YES



☒ **UV6GPM-V** ☒ **UV12GPM-V**

Ultraviolet Water Sterilizers

أجهزة تعقيم المياه بالأشعة فوق بنفسجية

48GPM



UV48GPM-HT

UV48GPM-HTM

STANDARD SPECIFICATION

DIMENSION L x W x D (mm)	980X230X280
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	48GPM
IN/OUT PORT	1 1/2"
UV LAMP (PC)	4
QUARTZ SLEEVE (PC)	4
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C (36-104°F)
LAMP WATTS	40Wx4
CHAMBER SS304/SS316	SS304/SS316
ACCUMULATED TIMER	UV48GPM-HT, HTM
UV LIGHT MONITOR	UV48GPM-HTM

SS316 CONSTRUCTION



UV60GPM-HTM

STANDARD SPECIFICATION

DIMENSION L x W x D (mm)	980X280X280
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	60GPM
IN/OUT PORT	2" or Flange
UV LAMP (PC)	5
QUARTZ SLEEVE (PC)	5
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C (36-104°F)
LAMP WATTS	40Wx5
CHAMBER SS304/SS316	SS316
ACCUMULATED TIMER	YES
UV LIGHT MONITOR	YES



UV72GPM-HTM

STANDARD SPECIFICATION

DIMENSION L x W x D (mm)	980X280X280
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	72GPM
IN/OUT PORT	2" or Flange
UV LAMP (PC)	6
QUARTZ SLEEVE (PC)	6
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C (36-104°F)
LAMP WATTS	40Wx6
CHAMBER SS304/SS316	SS316
ACCUMULATED TIMER	YES
UV LIGHT MONITOR	YES



UV120GPM

100GPM & 120GPM SPECIFICATION

DIMENSION L x W x D (mm)	1500X1100X560
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	100GPM, 120GPM
IN/OUT PORT	3" Flange
UV LAMP (PC)	10, 12
QUARTZ SLEEVE (PC)	10, 12
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C (36-104°F)
LAMP WATTS	40Wx10, X12
CHAMBER SS304/SS316	SS316/SS316L
ACCUMULATED TIMER	YES
UV LIGHT MONITOR	YES
SEPARATE POWER BOX	YES
LEAKAGE CIRCUIT BREAKER	YES
NO FUSE BREAKER	YES

24-36GPM UV STERILIZER - HORIZONTAL TYPE



⊗ UV24GPM-H



⊗ UV24GPM-HT



⊗ UV24GPM-HTM



⊗ UV36GPM-HT

⊗ UV36GPM-HTM



⊗ UV12GPM-VTM ⊗ UV24GPM-VTM ⊗ UV36GPM-VTM

UV24GPM STANDARD SPECIFICATION

DIEMENSION L x W x D (mm)	950X190X160(UV24GPM-H) 950X240X160(UV24GPM-HT, HTM)
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	24GPM
IN/OUT PORT	1"
UV LAMP (PC)	2
QUARTZ SLEEVE (PC)	2
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C(36-104°F)
LAMP WATTS	40Wx2
CHAMBER	SS304
ACCUMULATED TIMER	UV24GPM-HT, HTM
UV LIGHT MONITOR	UV 24GPM-HTM

UV36GPM STANDARD SPECIFICATION

DIEMENSION L x W x D (mm)	980X230X280
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	36GPM
IN/OUT PORT	1 1/2"
UV LAMP (PC)	3
QUARTZ SLEEVE (PC)	3
LAMP FAILURE DEVICE	YES
AMBIENT TEMPERATURE	2-40°C(36-104°F)
LAMP WATTS	40Wx3
CHAMBER	SS304
ACCUMULATED TIMER	UV36GPM-HT, HTM
UV LIGHT MONITOR	UV 36GPM-HTM

12-36GPM UV STERILIZER-VERTICAL TYPE

DIEMENSION L x W x D (mm)	340X320X1170 (12GPM) 340X320X1170 (24GPM) 340X320X1170 (36GPM)
ELECTRICAL VOLTS	110/220V, 50/60HZ
FLOW RATE	12, 24, 36GPM
IN/OUT PORT	3/4", 1", 1-1/2"
UV LAMP (PC)	40Wx1, x2, x3
QUARTZ SLEEVE (PC)	1, 2, 3pcs
ELECTRIC CONTROL BOX	YES
LEAKAGE CIRCUIT BREAKER	YES
NO FUSE BREAKER	YES
TEMP. CONTROL & FAN	20-50°C, YES
OPERATION INDICATORS	POWER / TEMP NORMAL / FAIL
CHAMBER & STAND	SS304
ACCUMULATED TIMER	YES
UV LIGHT MONITOR	YES

UV parts - Lamps , Quartz sleeves , Ballasts

UV LAMP - HIGH QUALITY USA LAMPS



BASE CHARACTERISTICS

Base Type	Four Pins
Base Material	Ceramic
Glaze color	White

CE LAMP STANDARD SPECIFICATION

MODEL	BASE FACE	ARC LENGTH	LAMP DIA.	LAMP WATT	LAMP CURRENT	LAMP VOLTAGE	UV OUTPUT UVC WATTS	UV OUTPUT@1M (mWatts/CM ²)	RATED LIFE (HRS)
UVS-L	212mm	138mm	15mm	10W	400ma	30V	3	32	9,000
UV1-L	287mm	211mm	15mm	14W	380ma	40V	4	40	9,000
UV6-L	436mm	360mm	15mm	24W	370ma	65V	7.3	72	9,000
UV12-L	843mm	767mm	15mm	40W	420ma	100V	14.3	130	9,000

UV BALLASTS - ELECTRONIC BALLASTS



BA-1014W



BA-02040W



BA-2040W-T

SPECIFICATION

Watts: 10-14W / 20-40W
UL 120V(50/60Hz)
CE 230V(50/60Hz)
Function Indicator
Damage Buzzer
Accumulated Timer (BA-2040W-T)
Fuse & Temperature protection


QUARTZ SLEEVES

High heat resistance, excellent light permeability and mechanical strength



SPECIFICATION

Material: SiO ₂ quartz
UVS-Q for UV-S
UV1-Q for UV-1GPM
UV6-Q for UV-6GPM
UV12-Q for UV-12GPM & up

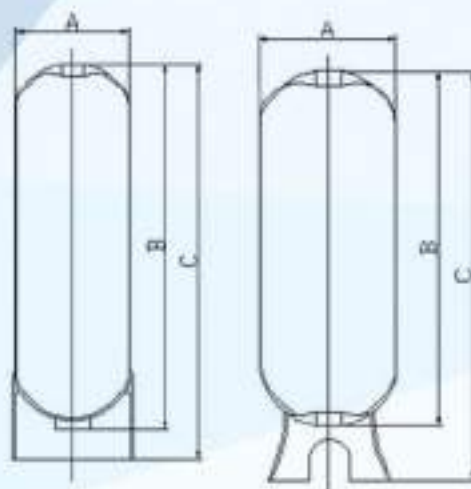

Size		Diameter (mm)	Height (mm)		Top Open	Bottom Open
In	mm		With Base	Without Base		
7"24(PE)	φ170×810	181	845	610	2.5'	/
7"35(PE)	φ170×875	181	925	690	2.5'	/
8"17(PE)	φ200×430	206	460	430	2.5'	/
8"20(PE)	φ200×500	206	495	470	2.5'	/
8"35(PE)	φ200×875	232	920	690	2.5'	/
8"44(PE)	φ200×1100	206	1140	1115	2.5'	/
9"35(PE)	φ220×875	232	905	690	2.5'	/
9"40(PE)	φ220×1005	232	1025	1005	2.5'	/
9"48(PE)	φ220×1220	232	1230	1205	2.5'	/
10"17(PE)	φ250×430	257	460	430	2.5'	/
10"35(PE)	φ250×875	257	915	690	2.5'	/
10"44(PE)	φ250×1100	257	1145	1115	2.5'	/
10"54(PE)	φ250×1360	257	1400	1370	2.5'	/
12"48(PE)	φ300×1215	308	1225	1215	2.5'	/
12"52(PE)	φ300×1320	308	1355	1320	2.5'	/
12"52(PE)	φ300×1320	308	1355	1310	2.5'	/
12"65(PE)	φ300×1650	308	1675	1610	2.5'	/
13"54(PE)	φ330×1360	334	1400	1370	2.5'	/
14"65(PE)	φ350×1650	358	1665	1610	2.5'	/
14"65(PE)	φ350×1650	358	1665	1610	4"	/
16"65(PE)	φ400×1650	405	1665	1640	2.5'	/
16"65(PE)	φ400×1650	405	1665	1640	4"	/
16"65(PE)	φ400×1650	405	1765	1640	4"	4"
16"72(FRP)	φ400×1800	405	1850	1795	2.5'	/
16"72(FRP)	φ400×1800	405	1850	1795	4"	/
16"72(FRP)	φ400×1800	405	1950	1795	4"	4"
18"65(PE)	φ450×1650	475	1600	1665	4"	/
18"65(PE)	φ450×1650	475	1900	1665	4"	4"
20"72(FRP)	φ500×1800	517	2040	1800	4"	4"
21"62(PE)	φ530×1550	545	1840	1600	4"	/
21"62(PE)	φ530×1560	545	1840	1600	4"	4"
24"72(FRP)	φ600×1800	612	2040	1800	4"	4"
30"72(FRP)	φ750×1800	762	2040	1800	4"	4"
36"72(FRP)	φ900×1800	930	2140	1800	4"	4"
40"72(FRP)	φ1000×1800	1020	2145	1800	6"FLG	6"FLG
48"72(FRP)	φ1200×1800	1220	2110	1800	6"FLG	6"FLG
48"96(FRP)	φ1200×2400	1220	2695	2400	6"FLG	6"FLG
60"96(FRP)	φ1500×2400	1520	2655	2400	6"FLG	6"FLG

(Thread top & bottom mount diffuser side mount)



(Serial No.)	(Item No.)	Dimensions (mm)					Diameter (inches/mm)	(Top & bottom opening)
		A	B	C	D	E		
JD311	H5671	197	400	88	Ø63(Ø60.3)	410	30"(Ø750MM)	4"-8"THREAD
JD312	H5671-L	180	483	88	Ø63(Ø60.3)	405	30"-40"(Ø750-Ø1000MM)	4"-8"THREAD
JD313	H5672-L	130	573	88	Ø63(Ø60.3)	538	30"-40"(Ø900-Ø1000)	4"-8"THREAD

(Threaded Adapter)



BJ-1 BJ-2 BJ-1-N BJ-3


(Serial No.)	(Item No.)	(Description)	(Material)
JD504	BJ-1-N	(4"-2.5" Thread adapter)	ABS(PPO)
JD504-N	BJ-1-N	(4"-2.5" Thread adapter)	ABS(PPO)
JD505	BJ-2	(6"-4" Thread adapter)	ABS(PPO)
JD507	BJ-3	(6"-4" Flange Thread adapter)	ABS(PPO)

FLECK (Top & bottom distributor)



(Serial No.)	(Item No.)	(Description)	(Material)
JD209	SS-3F-3/4	(Fleck top distributor)	6"-12"(ø150-ø300mm)
JD210	XS-3F-3/4	(Fleck bottom distributor)	6"-12"(ø150-ø300mm)
JD220	SS-3F-1	(Fleck top distributor)	6"-12"(ø150-ø300mm)

Tank Head

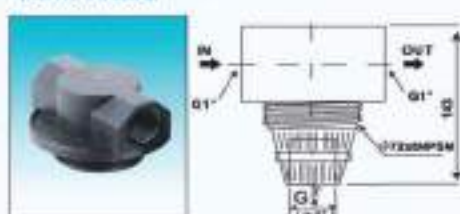

XN-2-0(JD103)
JD103
XN-2-0
6"-16"(ø150-ø400mm)

Industrial Product



PPF-07(Flange)
ø200mm 25mm ø32mm
ø40mm ø50mm ø75mm
ø90mm ø110mm 125mm
ø40mm



TMF56A



TMF56D



TMF56F

Manual Multi-Way Valve

Item No.	Controller Mode	Pressure	Temperature	Maximum Water Output	Filter Tank Diameter	Water inlet/outlet	Drain	Center Pipe	Base
TMF56A	Manual	0.1-0.6Mpa	5-45(°C)	4.5T/H	8-12"	1" INTERNAL THREAD	1" INTERNAL THREAD	1.05"	2-1/2"
TMF56D	Manual	0.1-0.6Mpa	5-45(°C)	10T/H	10-24"	2" INTERNAL THREAD	2" INTERNAL THREAD	1-1/2"	4"
TMF56F	Manual	0.1-0.6Mpa	5-45(°C)	6T/H	8-14"	1" INTERNAL THREAD	1" INTERNAL THREAD	1"	2-1/2"



TMF64A



TMF64D



TMF64F


Manual Soften Valve

Item No.	Controller Mode	Pressure	Temperature	Maximum Water Output	Filter Tank Diameter	Water inlet/outlet	Drain	Center Pipe	Base
TMF64A	Time/Flume regeneration	0.1-0.6Mpa	5-45(°C)	4.5T/H	8-18"	1" INTERNAL THREAD	1" INTERNAL THREAD	1.05"	2-1/2"
TMF64D	Time/Flume regeneration	0.1-0.6Mpa	5-45(°C)	10T/H	10-30"	2" EXTERNAL THREAD	2" INTERNAL THREAD	1-1/2"	4"
TMF64F	Time/Flume regeneration	0.15-0.6Mpa	5-45(°C)	8T/H		1-1/2" EXTERNAL THREAD	1" INTERNAL THREAD	1.25"	4"

8" Pressure Vessel




Side Port

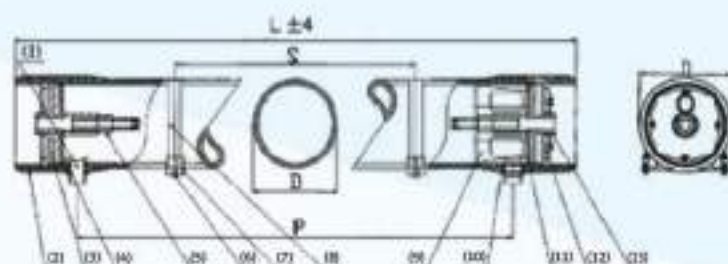

13	(PORT NUT)	2	ABS
12	(SECURING RING)	8	(STAINLESS STEEL 304)
11	(HEAD SEAL)	2	(EPDM)
10	(F/C PORT SEAL)	2	(EPDM)
9	(THRUST CONE)	1	ABS
8	(STRAP)	2	(STAINLESS STEEL)
7	(SADDLE)	2	(NATURAL RUBBER)
6	(STRAP SCREW)	4	(STAINLESS STEEL 304)
5	(ADAPTER)	2	ABS
4	(SEALING PLATE)	2	ABS
3	(BEARING PLATE)	2	(ALUMINUM ALLOY)
2	(SHELL)	1	(FRP)
1	(F/C PORT)	2	(STAINLESS STEEL 304)
Number	DESCRIPTION	QTY	MATERIAL



End Port

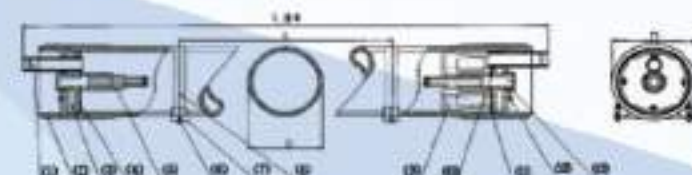

13	(PORT NUT)	2	ABS
12	(SECURING RING)	8	(STAINLESS STEEL 304)
11	(HEAD SEAL)	2	(EPDM)
10	(F/C PORT SEAL)	2	(EPDM)
9	(THRUST CONE)	1	ABS
8	(STRAP)	2	(STAINLESS STEEL)
7	(SADDLE)	2	(NATURAL RUBBER)
6	(STRAP SCREW)	4	(STAINLESS STEEL 304)
5	(ADAPTER)	2	ABS
4	(SEALING PLATE)	2	ABS
3	(BEARING PLATE)	2	(ALUMINUM ALLOY)
2	(SHELL)	1	(FRP)
1	(F/C PORT)	2	(STAINLESS STEEL 304)
Number	DESCRIPTION	QTY	MATERIAL

WORKING PRESSURE	LENGTH	L INCH(mm)	S INCH(mm)	P INCH(mm)	D INCH(mm)
300PSI (2.1MPa)	1	57.95(1470)	27.99(711)	44.96(1142)	8.43(214)
	2	97.95(2486)	55.98(1422)	84.96(2158)	8.43(214)
	3	137.95(3502)	80.00(2032)	124.96(3174)	8.43(214)
	4	177.95(4518)	100.01(2565)	165.20(4190)	8.43(214)
	5	217.95(5534)	121.42(3084)	204.96(5206)	8.43(214)
	6	257.95(6550)	142.83(3628)	244.96(6222)	8.43(214)
	7	297.95(7566)	164.24(4172)	284.96(7238)	8.43(214)
450PSI (3.1MPa)	1	57.95(1470)	27.99(711)	44.96(1142)	8.58(218)
	2	97.95(2486)	55.98(1422)	84.96(2158)	8.58(218)
	3	137.95(3502)	80.00(2032)	124.96(3174)	8.58(218)
	4	177.95(4518)	100.01(2565)	165.20(4190)	8.58(218)
	5	217.95(5534)	121.42(3084)	204.96(5206)	8.58(218)
	6	257.95(6550)	142.83(3628)	244.96(6222)	8.58(218)
	7	297.95(7566)	164.24(4172)	284.96(7238)	8.58(218)
600PSI (4.1MPa)	1	59.59(1514)	711	44.96(1142)	8.66(220)
	2	99.59(2530)	1422	84.96(2158)	8.66(220)
	3	139.59(3546)	2032	124.96(3174)	8.66(220)
	4	179.59(4562)	2642	165.20(4190)	8.66(220)
	5	219.59(5578)	3252	204.96(5206)	8.66(220)
	6	259.59(6594)	3862	244.96(6222)	8.66(220)
	7	299.59(7610)	4472	284.96(7238)	8.66(220)
800PSI (5.5MPa)	1	59.59(1514)	711	44.96(1142)	8.82(224)
	2	99.59(2530)	1422	84.96(2158)	8.82(224)
	3	139.59(3546)	2032	124.96(3174)	8.82(224)
	4	179.59(4562)	2642	165.20(4190)	8.82(224)
	5	219.59(5578)	3252	204.96(5206)	8.82(224)
	6	259.59(6594)	3862	244.96(6222)	8.82(224)
	7	299.59(7610)	4472	284.96(7238)	8.82(224)
1000PSI (6.9MPa)	1	59.59(1514)	711	44.96(1142)	8.90(226)
	2	99.59(2530)	1422	84.96(2158)	8.90(226)
	3	139.59(3546)	2032	124.96(3174)	8.90(226)
	4	179.59(4562)	2642	165.20(4190)	8.90(226)
	5	219.59(5578)	3252	204.96(5206)	8.90(226)
	6	259.59(6594)	3862	244.96(6222)	8.90(226)
	7	299.59(7610)	4472	284.96(7238)	8.90(226)

WORKING PRESSURE	LENGTH	L INCH(mm)	S INCH(mm)	P INCH(mm)	D INCH(mm)
308PSI (2.1MPa)	1	57.95(1470)	27.99(711)	44.96(1142)	8.43(214)
	2	97.95(2486)	55.98(1422)	84.96(2158)	8.43(214)
	3	137.95(3502)	80.00(2032)	124.96(3174)	8.43(214)
	4	177.95(4518)	100.01(2565)	165.20(4190)	8.43(214)
	5	217.95(5534)	121.42(3084)	204.96(5206)	8.43(214)
	6	257.95(6550)	142.83(3628)	244.96(6222)	8.43(214)
	7	297.95(7566)	164.24(4172)	284.96(7238)	8.43(214)
458PSI (3.1MPa)	1	57.95(1470)	27.99(711)	44.96(1142)	8.58(218)
	2	97.95(2486)	55.98(1422)	84.96(2158)	8.58(218)
	3	137.95(3502)	80.00(2032)	124.96(3174)	8.58(218)
	4	177.95(4518)	100.01(2565)	165.20(4190)	8.58(218)
	5	217.95(5534)	121.42(3084)	204.96(5206)	8.58(218)
	6	257.95(6550)	142.83(3628)	244.96(6222)	8.58(218)
	7	297.95(7566)	164.24(4172)	284.96(7238)	8.58(218)
608PSI (4.1MPa)	1	59.59(1514)	711	44.96(1142)	8.66(220)
	2	99.59(2530)	1422	84.96(2158)	8.66(220)
	3	139.59(3546)	2032	124.96(3174)	8.66(220)
	4	179.59(4562)	2642	165.20(4190)	8.66(220)
	5	219.59(5578)	3252	204.96(5206)	8.66(220)
	6	259.59(6594)	3862	244.96(6222)	8.66(220)
	7	299.59(7610)	4472	284.96(7238)	8.66(220)
808PSI (5.5MPa)	1	59.59(1514)	711	44.96(1142)	8.82(224)
	2	99.59(2530)	1422	84.96(2158)	8.82(224)
	3	139.59(3546)	2032	124.96(3174)	8.82(224)
	4	179.59(4562)	2642	165.20(4190)	8.82(224)
	5	219.59(5578)	3252	204.96(5206)	8.82(224)
	6	259.59(6594)	3862	244.96(6222)	8.82(224)
	7	299.59(7610)	4472	284.96(7238)	8.82(224)
1008PSI (6.9MPa)	1	59.59(1514)	711	44.96(1142)	8.90(226)
	2	99.59(2530)	1422	84.96(2158)	8.90(226)
	3	139.59(3546)	2032	124.96(3174)	8.90(226)
	4	179.59(4562)	2642	165.20(4190)	8.90(226)
	5	219.59(5578)	3252	204.96(5206)	8.90(226)
	6	259.59(6594)	3862	244.96(6222)	8.90(226)
	7	299.59(7610)	4472	284.96(7238)	8.90(226)


Pressure vessels

حاويات الضغط

4" Pressure Vessel




Side Port

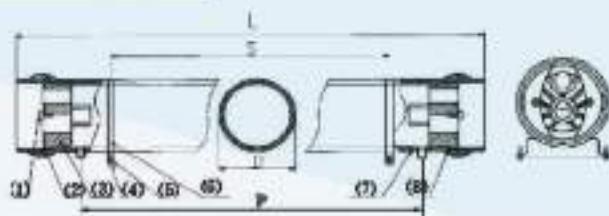

8	(END PLUGSEAL)	2	(EPDM)
7	(SHELL)	1	(FRP)
6	(STRAP)	2	(STAINLESS STEEL)
5	(SADDLE)	2	(NATURAL RUBBER)
4	(STRAP SCREW)	4	(STAINLESS STEEL 304)
3	(END PLUG)	2	ABS
2	(BAFFLE)	4	(STAINLESS STEEL 304)
1	(SCREW)	4	(STAINLESS STEEL 304)
Number	DESCRIPTION	QTY	MATERIAL



End Port

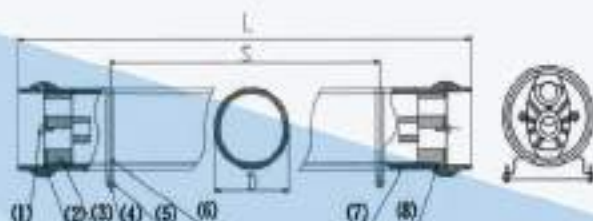

8	(END PLUGSEAL)	2	(EPDM)
7	(SHELL)	1	(FRP)
6	(STRAP)	2	(STAINLESS STEEL)
5	(SADDLE)	2	(NATURAL RUBBER)
4	(STRAP SCREW)	4	(STAINLESS STEEL 304)
3	(END PLUG)	2	ABS
2	(BAFFLE)	4	(STAINLESS STEEL 304)
1	(SCREW)	4	(STAINLESS STEEL 304)
Number	DESCRIPTION	QTY	MATERIAL



WORKING PRESSURE	LENGTH	L INCH(mm)	S INCH(mm)	P INCH(mm)	D INCH(mm)
300PSI (2.1MPa)	1	46.85(1190)	24.02(610)	39.88(1013)	4.41(112)
	2	66.85(2206)	53.15(1350)	79.88(2028)	4.41(112)
	3	126.85(3222)	77.17(1960)	109.88(3048)	4.41(112)
	4	166.85(4238)	62.20(2158)*2	159.88(4061)	4.41(112)
450PSI (3.1MPa)	1	46.85(1190)	24.02(610)	39.88(1013)	4.49(114)
	2	66.85(2206)	53.15(1350)	79.88(2028)	4.49(114)
	3	126.85(3222)	77.17(1960)	109.88(3048)	4.49(114)
	4	166.85(4238)	62.20(2158)*2	159.88(4061)	4.49(114)
600PSI (4.1MPa)	1	46.85(1190)	24.02(610)	39.88(1013)	4.57(116)
	2	66.85(2206)	53.15(1350)	79.88(2028)	4.57(116)
	3	126.85(3222)	77.17(1960)	109.88(3048)	4.57(116)
	4	166.85(4238)	62.20(2158)*2	159.88(4061)	4.57(116)
800PSI (5.5MPa)	1	46.85(1190)	24.02(610)	39.88(1013)	4.65(118)
	2	66.85(2206)	53.15(1350)	79.88(2028)	4.65(118)
	3	126.85(3222)	77.17(1960)	109.88(3048)	4.65(118)
	4	166.85(4238)	62.20(2158)*2	159.88(4061)	4.65(118)
1000PSI (6.9MPa)	1	46.85(1190)	24.02(610)	39.88(1013)	4.72(120)
	2	66.85(2206)	53.15(1350)	79.88(2028)	4.72(120)
	3	126.85(3222)	77.17(1960)	109.88(3048)	4.72(120)
	4	166.85(4238)	62.20(2158)*2	159.88(4061)	4.72(120)

WORKING PRESSURE	LENGTH	L INCH(mm)	S INCH(mm)	D INCH(mm)
300PSI (2.1MPa)	1	46.85(1190)	24.02(610)	4.41(112)
	2	66.85(2206)	53.15(1350)	4.41(112)
	3	126.85(3222)	77.17(1960)	4.41(112)
	4	166.85(4238)	62.20(2158)*2	4.41(112)
450PSI (3.1MPa)	1	46.85(1190)	24.02(610)	4.49(114)
	2	66.85(2206)	53.15(1350)	4.49(114)
	3	126.85(3222)	77.17(1960)	4.49(114)
	4	166.85(4238)	62.20(2158)*2	4.49(114)
600PSI (4.1MPa)	1	46.85(1190)	24.02(610)	4.57(116)
	2	66.85(2206)	53.15(1350)	4.57(116)
	3	126.85(3222)	77.17(1960)	4.57(116)
	4	166.85(4238)	62.20(2158)*2	4.57(116)
800PSI (5.5MPa)	1	46.85(1190)	24.02(610)	4.65(118)
	2	66.85(2206)	53.15(1350)	4.65(118)
	3	126.85(3222)	77.17(1960)	4.65(118)
	4	166.85(4238)	62.20(2158)*2	4.65(118)
1000PSI (6.9MPa)	1	46.85(1190)	24.02(610)	4.72(120)
	2	66.85(2206)	53.15(1350)	4.72(120)
	3	126.85(3222)	77.17(1960)	4.72(120)
	4	166.85(4238)	62.20(2158)*2	4.72(120)

Industrial RO Membranes

Applications for Reverse Osmosis Membrane



Item No.	TW30-1845-50	TW30-1812-75	TW30-1845-60	TW1812-50	TW1812-100	BW-3013	BW-2540	BW-4021	BW-4040	BW30-4040	ULP21-4040	BW30-400
G/D	50	75	60	50	100	400	756	1200	1500	1500	1506	3000
COMPANY NAME	FILMTEC	FILMTEC	MAXMEEN	HIDROTEK	HIDROTEK	HIDROTEK	HIDROTEK	HIDROTEK	HIDROTEK	FILMTEC	FILTER PRO	FILMTEC
MADE	USA	USA	TAIWAN	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	USA	TAIWAN	USA
Active Area ft ² (m ²)	0.36	0.36	0.36	0.36	0.54	1.2	2.5	3.3	7.5	7.5	7.5	37
Permeate Flow Rate gpd(m ³)	0.19	0.19				400	800	1000	2500	2500	2500	10500
NaCl	250PPM	250PPM	250PPM	250PPM	250PPM	250PPM	1000mg/l	1500mg/l	1500mg/l	1500mg/l	1500mg/l	1500mg/l
Test Pressure (psi)	70	70	70	70	70	90	110	150	150	150	150	150
PH	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
Single Membrane Recovery	15%	15%	15%	15%	15%	15%	15%	15%	15%	15%	15%	15%
Stabilized Salt Rejection (%)	97	97	97	97	97	97	98	99	99	99.9	98	99.5
Min. Salt Rejection (%)	95	95	95	95	95	95	97	98	98	98	97	98
Unit Packing Dimension (cm)	31x31x32cm/25pcs	31x31x32cm/25pcs	31x31x32cm/25pcs	31x31x32cm/25pcs	31x31x32cm/25pcs	34x36cm/16	8x8x110	13x13x60	13x13x110	13x13x110	13x13x110	23x22x105



Chemicals dosing pumps مضخات الحقن الكيميائي

EMC



PMP HTA 0705 FP*K*230VAC

Model	Head Model	Voltage	Fitting	Backpressure	Head Material	Current	Balls	Flow	O-ring	Protection	color
HTA	K	230VAC_50-60Hz	4x6	700KPa-7bar-101.5PSI	PVDF	0.08	Ceramic	SL/H 1.33GPH	VITON	IP65	Gray

PMP FCE 073,5K+FP 230VAC

Model	Head Model	Voltage	Fitting	Backpressure	Head Material	Current	Balls	Flow	O-ring	Protection	color
FCE	K	230VAC_50-60Hz	4x6	700KPa-7bar-101.5PSI	PVDF	0.07	Ceramic	3.5L/H 0.93GPH	VITON	IP66	Red

PENTAIR



Description	Voltage	current	Color	Protection	Material Head	O-ring	Balls	Fitting	Backpressure(bar)	Flow
CCL05008	100-240V 50/60Hz 12W	2.2A	Sky Blue RA 5015	IP65	PVDF-T	FPM	CERAMIC	1/2 Gas	8-10-(116-145PSI) (1.32-0.79GPH)	3-SL/H

SEKO



Item no.	Pressure (Mpa)	Flow (L/H)	Inlet/Outlet Size (mm)	Power (W)
AKS: W/O Liquidometer Alam	0.12	4.0	4/6	12.2
	0.1	5.0		
	0.08	6.0		
	0.02	8.0		
AKL: With Liquidometer Alam	0.12	7.0	4/6	23.9
	0.1	10.0		
	0.05	15.0		
	0.01	18.0		
803	0.05	20.0	8/12	22.2
	0.04	25.0		
	0.02	40.0		
	0.01	54.0		


Metring Pumps

مضخات الضغط لوحدة التحلية الصغيرة



PM6689 SPECIFICATION

	80psi(5.5kgs)	110psi(7.5kgs)	RO Type
24VDC	1.1 LPM	0.80 LPM	50GPD
24VDC	1.3 LPM	0.95 LPM	75-100GPD
36VDC	2.5 LPM	2.00 LPM	150-200GPD
24VDC	2.2 LPM	2.00 LPM	200-400GPD

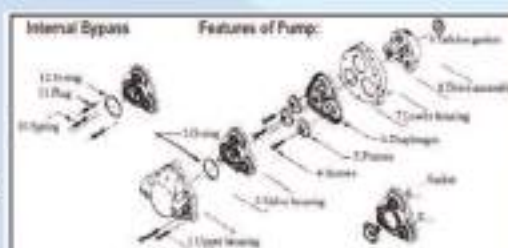

CCK PUMP

PM6689-24
50, 100GPD

PM6689-36
200GPD

PM6689-24H
200 - 400GPD

Automatic Pumps Control

أجهزة التحكم في المضخات الاوتوماتيكية



EPC-12

With the possibility of adjustment

- Voltage : 110-240V
- Max current : 30A
- Frequency : 50/60Hz
- Protection Grade : IP65
- Strating Pressure : 0.8bar-6.8bar
- Max Pressure :9.8bar
- Max Power : 2.2kw



EPC-9

- Voltage : 110-240V
- Max current : 30A
- Frequency : 50/60Hz
- Protection Grade : IP65
- Strating Pressure : 1.5 bar
- Max Pressure :10 bar
- Max Pauer : 2.2kw



EPC-7

- Voltage : 110-240V
- Max current : 30A
- Frequency : 50/60Hz
- Protection Grade : IP65
- Strating Pressure : 1.5 bar
- Max Pressure :10 bar
- Max Power : 2.2kw
- Connection : R1




EPC-1

- Voltage : 110-240V
- Max current : 20A
- Frequency : 50/60Hz
- Protection Grade : IP65
- Strating Pressure : 1.5 bar
- Max Pressure :10 bar



MAX-135 30A

- Voltage : 220-240V
- Max current : 30A
- Frequency : 50/60Hz
- Protection Grade : IP65
- Strating Pressure : 1.5 bar
- Max Pressure :10 bar



MAX-135 10A

- Voltage : 220-240V
- Max current : 10A
- Frequency : 50/60Hz
- Protection Grade : IP65
- Strating Pressure : 1.5 bar
- Max Pressure :10 bar

SCALA 2 SMART WATER PUMP



The Grundfos SCALA pumps are all-in-one integrated self-priming pressure boosters designed for domestic use and ensure a constant supply of clean water to households, garden and light commercial applications.

مضخات "Grundfos SCALA" عبارة عن منظومة ضخ متكاملة ذكية و متطورة ذاتية التحضير مصممة للاستخدام المنزلي و تضمن الامداد المستمر بالمياه النظيفة للمنازل و الحدائق والتطبيقات التجارية الخفيفة .

Tecnical Specification :

- Liquid type : clean munipicle water
- Flow rate up to 60L/m
- Total lift up to 45M
- Cover : Stainless Tecnopolymer
- Fan : Stainless Tecnopolymer
- Culmun : Stainless Steel
- Electricity : 550W- 1VAC - 220V 50/60Hz
- Inlet & Outlet : 1"

Made in Serbia

المواصفات الفنية :

- نوع السائل : مياه البلدية النظيفة
- معدل تدفق حتى 60 لتر في الدقيقة
- رفع كلي حتى 45 متر
- الغلاف : تكتوبوليمر غير قابل للصدا
- المروحة : تكتوبوليمر غير قابل للصدا
- العمود : استاتلس ستيل
- الكهرباء : 550 واط - 1 فاز - 220 فولت 50/60-هيرتز
- فتحات الدخول و الخروج : 1 بوصة

صنع في صربيا

مضخات مياه متعددة المقاسات و الاستعمالات من 0.5 حصان إلى 10 حصان

Water Pumps of various sizes and uses from 0.5HP to 10HP



Central Water Heaters

سخانات مركزية



• Multiple Sizes : 40G - 50G - 66G - 73G - 80G - 120G

• Made in USA - PRC /USA - KSA

• متعددة المقاسات : 40G - 50G - 66G

73G - 80G - 120G -

• صناعة أمريكية - صيني / أمريكي - سعودي

Instant Water Heaters

سخانات مياه مباشرة



Features

- Multi Safe (5 Safety Features)
- Tubular Heating Element
- Double Thermostat
- Adjustable Power (3-4-7kW)

MAXMEEN

Power : 7 kW

Voltage : 230 V AC

Frequency : 50 / 60 Hz

Flow Rate : 4 L/min

Min Pressure For Open Outlet : 0 Pa

Min Operating Pressure : 25 kPa (2.5 mH₂O)

Max Operating Pressure : 600 kPa (61 mH₂O)

Size : 330x210x110mm

Gross Weight : 2.9 kg

Protection Class : I

IP Code : IPX4

Water tanks cooling and heating devices of multiple sizes

أجهزة تبريد وتسخين خزانات المياه بمقاسات متعددة



FAUCETS

الحنفيات



GF-02C

Goose Faucet with Chrome spout and chrome handle
Packing Dimension: 48x35x35cm/40pcs

GF-02S

Goose Faucet with Chrome spout and chrome handle
Packing Dimension: 47.5x34x39cm/40pcs

GF-02G

Goose Faucet with Gold spout and Gold handle
Packing Dimension: 48x35x34cm/40pcs

GF-03C

Packing Dimension: 59x37x44cm/50pcs

GF-04C

Goose Faucet with Chrome spout and chrome handle
Packing Dimension: 55x36x33cm/30pcs

GF-05

Dual function Faucet
Packing Dimension: 40x36x39cm/20pcs



GF-06

Packing Dimension: 40x36x39cm/20pcs

GF-06S

Packing Dimension: 48x37x71cm/50pcs

GF-07

Dual function Faucet
Packing Dimension: 40.2x35.6x38cm/20pcs

GF-08

Luxury Kitchen Faucet
(For Tap Water & RO Water)
Packing Dimension: 44x41x45.5cm/10pcs

GF-09

Luxury Kitchen Faucet
Packing Dimension: 41x36x40cm/10pcs

Wrenchs

مفاتيح الفلاتر



WR-01

1/2" series housing wrench
This is suitable for 124-10

WR-02

RO housing wrench
This is suitable for 122-10

WR-02B

RO housing wrench
This is suitable for 122-20

WR-04

Table water wrench
This is suitable for FT-1

WR-05

Membrane housing wrench
for 500/750/1000 Membrane Housing

WR-06

Membrane housing wrench
for 2000/3000/4000 Membrane Housing

WR-07

Membrane housing wrench
for N03/N03F Membrane Housing

Pressure tanks

صناديق الحفظ " لتخزين المياه المنقاة "



20G Steel Tank

Packing Dimension: 42x42x82/1pc



11G Steel Tank

Packing Dimension: 42x42x60/1pc



5.0G Fiber Tank

Packing Dimension: 280x401



4.0g Plastic Tank

Packing Dimension: 28x28x42/1pc

Pressure Gauges



PR-101
Ø40mm

PR-105
Ø52mm

PR-102
Oil Filled
Ø63mm

PR-103
Ø40mm

PR-106
Oil Filled
Ø52mm

PR-104
Oil Filled
Ø63mm



GAUGE-S
Small pressure Gauge
*1/8" connector(option)



GAUGE-H
Horizontal Type w/bracket



GAUGE-V
Vertical Type

	PIPE SIZE	FACE DIA	TYPE	RANGE (PSI-KG/PSI-BAR)
GAUGE-S	1/8"	40mm	Dry	0-160PSI / 0-11BAR 0-200PSI / 0-15KG 0-200PSI / 0-15BAR
GAUGE-H	1/4"	60mm	Liquid filled	0-300PSI / 0-20KG 0-500PSI / 0-35KG 0-700PSI / 0-50KG
GAUGE-V	1/4"	60mm	Liquid filled	0-100PSI / 0-7KG 0-150PSI / 0-10KG 0-200PSI / 0-15BAR 0-300PSI / 0-20KG 0-500PSI / 0-35KG 0-700PSI / 0-50KG

Flow Meters



Panel Type Flow Meter

Item No.	Measure		Inlet/Outlet Connection
	GPM	LPM	
FM-5 / Z-4002	0.5-5GPM	1-18LPM	1/2"
FM-10 / Z-4003	1-10GPM	5-35LPM	1"
FM-20 / Z-4004	2-20GPM	10-75LPM	1"
FM-30 / Z-4005	3-30GPM	10-100LPM	1"
FM-40	5-40GPM	20-150LPM	1"
FM-20 / Z-4006	10-200GPM	200-800LPM	2"
60	0.1-0.5GPM	1-1.5LPM	
61	0.1-1GPM	1.5-4LPM	
62	0.1-1.5GPM	1-7LPM	
63	0.5-1GPM	1-18LPM	
64	1-1.5GPM	1-18LPM	
65	1-2GPM	10-80LPM	
66	2-2.5GPM	10-75LPM	
67	5-5.5GPM	30-130LPM	



Inline Type Flow Meter

Item No.	Measure		Inlet/Outlet Connection
	GPM	LPM	
FM-2 / K1	0.2-2GPM	1-7LPM	1/2"
FM-5 / K3	0.5-5GPM	2-18LPM	1/2"
FM-10 / K4	1-10GPM	5-35LPM	1"
FM-14 / K5	2-14GPM	5-55LPM	1"
FM-20 / K6	3-20GPM	10-75LPM	1"
FM-35 / K7	5-35GPM	20-130LPM	1"
2-4001	0.2-2GPM	1-7LPM	
2-4002	0.5-5GPM	2-18LPM	
2-4003	1-10GPM	5-35LPM	
2-4004	2-20GPM	10-75LPM	
2-4005	3-30GPM	10-100LPM	
2-4006	5-50GPM	20-200LPM	
	20-80GPM	80-120LPM	
2-4007	20-80GPM	50-300LPM	
	10-100GPM	75-400LPM	
2-4008	50-150GPM	150-600LPM	
2-4009	80-200GPM	200-800LPM	



Union inline

Item No.	Measure		Inlet/Outlet Connection
	GPM	LPM	
FM-5	0.5-5GPM	1.5-18LPM	1/2"
FM-10	1-10GPM	5-35LPM	DN32 -MM
FM-20	2-20GPM	5-82LPM	DN32 -MM
FM-25	2.5-25GPM	10-100LPM	DN32 -MM
FM-30	3-30GPM	10-120LPM	DN32 -MM
FM-45	5-45GPM	20-180LPM	DN55 -MM
FM-60 / Z-4008	20-80GPM	20-340LPM	DN55 -MM
FM-100 / Z-4007	20-100GPM	40-400LPM	DN55 -MM
FM-50 / Z-4009	50-150GPM	100-550LPM	DN55 -MM
FM-160	40-160GPM	150-650LPM	DN55 -MM
FM-250	50-250GPM	200-1000LPM	DN55 -MM

Water Softening Parts - Control solenoid , Brain tanks and Salt valves

CONTROL Valve

Aquapro supplies 1" Clack Valves and parts which are adapted in Aquapro Softening system.



WS1TC-S(-F)

Time clock type - Softener or Filter

MAXMEEN

Including:
Clack Valve TC type(S, or F)
12V CE adaptor
Drain line flow control
Injector(Softener only)
1" inlet connector
Top distributor
Brine pipe connector (3/4"xF1/2"Barb)
Wrench for Valve (*option)
Product manual



WS1CI-S (-F)

Volume type - Softener or Filter



12V CE adaptor

VALVES

محابس المياه الكهربائية

SOLENOID VALVES - NORMALLY CLOSED TYPE

 SV-1R Mini type N.C.1/8"	 SV-2R N.C.1/4" PP Body	 SV-2 N.C.1/4" PP Body	 SV-3 N.C.3/8"	 SV-4 N.C.1/2"	 SV-6 N.C.3/4"	 SV-8 N.C.1",1-1/2",2"
						

CODE	PIPE	ORIFICE	CV	CODE	PIPE	ORIFICE	CV	CODE	PIPE	ORIFICE	CV	CODE	PIPE	ORIFICE	CV
SV-1	1/8"	2.5mm	0.21	SV-3	3/8"	5mm	0.5	SV-6	3/4"	20	0.21	SV-112	1-1/2"	40mm	24
SV-2	1/4"	2.5mm	0.21	SV-4	1/2"	13mm	4.5	SV-8	1"	25	0.21	SV-2IN	2"	50mm	36

BRINE TANKS AND SALT VALVES - 8"-16" VESSELS



 **SALT VALVE SET**

 **BT-1434**



SALT VALVE SET

Salt Valve Pipe: 4" diax80cmLx2mmT
Salt Valve(for 8" up to 18" vessel)
Cab-fit White Elbow Connector
*could be ordered individually.



BT-1434

Brine Tank with grid
Capacity: 100L
For 818 up to 1665 softener



chemical Tank

80L - 100L - 200L

						
VA-01 1/2", 3/8" Tube Diverter valve	VA-02 1/2", 3/8" Tube Diverter valve	VA-03 1/2", 3/8" Tube Diverter valve	VA-08 1/2" Rubber connector	FC-04 1/2", 1/2" or 3/4", 3/4" Diverter connector		
						
AVA-02Q 1/4" Diverter Valve	MV-01M 1/4", 1/4" Chromed Mixing Valve	MV-02M 1/4" RO Tube, 1/4" RO Tube Chromed Mixing Valve	VA-09 1/2", 3/4" Diverter connector	VA-09B 1/2", 3/4" Diverter connector		
						
MF-02 3/4", 3/4", 1/4" Diverter Valve	MF-02A 3/8", 3/8", 1/4" Diverter Valve	MF-02B 3/4", 3/4", 1/4" Diverter Valve	MF-01 1/2", 1/2", 1/4" Diverter Valve	MF-02S 3/8", 3/8", 1/4" Diverter Valve	MF-03 3/4", 1/4" Diverter Valve	MFV-01 1/2", 1/2", 1/4" Diverter Valve
						
MFV-02 1/2", 1/2", 1/4" Tube Metal Connector	CT-01 1/4", 3/8" Tube Metal Connector	CT-02 1/4", 3/8" Tube Metal Connector	CT-03 1/4", 3/8" Tube Metal Connector	PRV-2 1/4", 1/4" Tube Pressure reduce valve	PRV-3 1/4", 1/4" Tube Pressure reduce valve (Quick Fitting)	

					
SWLP Low Pressure Switch 2-4psi Start Pressure	SWHP High Pressure Switch 20-40psi Adjustable	SWBR-JC Auto Shut-off Valve Jaco Type	SWBR-JG Auto Shut-off Valve with Quick Connector	SWDWS Flow Restrictor Rate:250/350/420/525ml 800/1000ml	SWDWS-JC Flow Restrictor Rate: 400ml
					
TUBE LLDPE TUBE 1/4", 3/8", 1/2" White, Blue, Black, Red, Green	TUBE-HP High pressure tube 1/2", 3/4", 1"	ABVL-A4 Tank ball valve 1/4"	ABVL-JC/JG Tank ball valve-JC 1/4" Tank ball valve-JG 1/4", 3/8"	ABVS-JG Straight ball valve 1/4" or 3/8"	CKB-2 CKB-25 2" Single Clamp 2.5" Single Clamp
					
CK-45 4" DIA CLAMP	CK-4 4" DIA CLAMP	CK-PR For pressure reducer	FWC-1 1/2" Feed Water Connector 1/4" or 3/8" Tube	FWC-2 3/4" Feed Water Connector 1/4" or 3/8" Tube	FI-17 1/2" Feed Water Connector 1/4", 3/8" Tube
					
SV-12A Pipe Saddle Valve	CN-CP-M CP Brass Male 1/4" Tube Connector 1/4", 1/2", 3/4" M	CN-CP-F CP Brass Female 1/4" Tube Connector 1/4", 1/2", 3/4" F	BUSHING 1"MX3/4" F 1/2"MX3/8" 3/4"MX1/2" F 3/8"MX1/4" F 3/4"MX1/4" F	NV-SS316 S.Steel 316 Needle Valve 1/2", 3/4", 1"	NIPPLE-CP Equal 1/4", 3/8", 1/2", 3/4" Reduced 1" x 3/4", 3/4" x 1/2"
					
PR-RD40 / PR-RD70 Stop water hammer In/out 1/4" or 3/8" quick fitting	YK High Pressure Switch				

Limit: 40psi & 70psi
*Clip as option

High Pressure Switch

Spare Parts / Measuring Devices

قطع غيار / أجهزة القياس



				
ASV-408 Auto Shut-off Valve	VA-05 Feed Water Valve 1/4" Outer Pch 1/4" Inner Pipe	VA-06 Feed Water Valve 1/4" Outer Pch 3/8" Inner Pipe	SAV-824 Solenoid Valve	SAV-825 Solenoid Valve
				
FL-505 Float Switch	FL-506 Float Switch	FL-507 Float Switch	SAV-826-1 Auto Flush Solenoid Valve	SAV-826-2 Auto Flush Solenoid Valve with Flow-Limit Valve

Measuring Devices






أجهزة القياس

				
TDS-D Panel type TDS meter Range: 1 - 9990PPM	PH-D PH Reader Range: pH1-14 Temp: 1-80°C	PR-D Digital Pressure Reader Range: up to 100PSI (7bar)	MC-2 RO Controller AC110V, 240V 50/60Hz (24V available) Protect RO system Six Function lamp indications Flush automatic, or manual Protecting pump 5 Function indicators	TDS-D2 Industrial Water Quality Monitor Two switch for Raw water & RO water Readed: 1-8000uS (1-4000ppm)
				
7320 REVERSE OSMOSIS PANEL MOUNT PROGRAM CONTROL	ASTER 650 INLINE CONDUCTIVITY / TDS PANEL MOUNT FOR REVERSE OSMOSIS SYSTEM	3500 TDS/ PH INLINE TDS & PH PANEL MOUNT FOR REVERSE OSMOSIS SYSTEM	MC2-220V-F PURE WATER MACHINE CONTROL BOX AUTO FLUSHING CONTROLLER 220V	TETDS Total Dissolved Solid Pen TDS-1: 1 - 999PPM TDS-2: 10 - 9990PPM TDS-4T: 1 - 9990PPM + Temp.
				
RO-301S Reverse osmosis program controller	CCT-3330V A panel instrument for on-line monitoring of industrial process conductivity			

Fittings , Quick Connectors , Nipples

موصلات سريعة


PLASTIC JACO FITTINGS

						
Male Connector 1/4"tube x 1/8"pipe	Male Connector (oring) 1/4"tube x 1/4"pipe	Male Connector 1/4"tube x 3/8"pipe	Male Connector 1/4"tube x 1/2"pipe	Male Connector(oring) 3/8"tube x 1/4"pipe	Male Connector 3/8"tube x 3/8"pipe	Male Connector 3/8"tube x 1/2"pipe
⊗ 10-4-2	⊗ 10-4-4(O)	⊗ 10-4-6	⊗ 10-4-8	⊗ 10-6-4(O)	⊗ 10-6-6	⊗ 10-6-8
						
Male Connector 10-8-8	Union Connector 15-4-4	Union Connector 15-4-D	Union Connector 15-4-6	Union Connector 15-6-6	Female connector 25-4-2	Female connector 25-4-4
						
Male Elbow 1/4"tube x 1/8"pipe	Male Elbow (oring) 1/4"tube x 1/4"pipe	Male Elbow 1/4"tube x 3/8"pipe	Male Elbow 3/8"tube x 1/4"pipe	Male Elbow 3/8"tube x 3/8"pipe	Male Elbow 1/2"tube x 3/8"pipe	Female Elbow 1/2" tube x 1/2" thread
⊗ 40-4-2	⊗ 40-4-4	⊗ 40-4-6	⊗ 40-6-4	⊗ 40-6-6	⊗ 40-8-6	⊗ 40-8-8
						
Female Elbow 1/4"tube x 1/8"thread	Female Elbow 1/4"tube x 1/4"thread	Union Elbow 1/4"tube x 1/4"tube	Union Elbow 3/8"tube x 3/8"tube	Male Branch Tees (O) 1/4"tube x 1/4"pipe	Male Branch Tees 3/8"tube x 1/4"pipe	Male Branch Tees 3/8"tube x 3/8"pipe
⊗ 45-4-2	⊗ 45-4-4	⊗ 50-4-4	⊗ 50-6-6	⊗ 60-4-4(O)	⊗ 60-6-4	⊗ 60-6-6
						
Union Tees 1/4"tube	Union Tees 3/8"tube	Union Tees 1/2"tube	Side Male Tees 1/4"tube x 1/4"pipe	Side Male Tees 3/8"tube x 1/4"pipe	Side Male Tees 3/8"tube x 3/8"pipe	Side Male Tees 1/4"tube x 3/8"tube x 1/4"pipe
⊗ 70-4	⊗ 70-6	⊗ 70-8	⊗ 75-4-4	⊗ 75-6-4	⊗ 75-6-6	⊗ 76-4-4

PLASTIC BUSHING

				
1" male x 1/2"female	1" male x 3/8"female	1" male x 1/4"female	1"female x 1/2"male	3/4"female x 1"male
⊗ BUSHING-P-88M12F	⊗ BUSHING-P-88M38F	⊗ BUSHING-P-88M14F	⊗ CN-P-88F12M	⊗ CN-P-34F88M

PLASTIC NIPPLE WITH O-RING

						
1/4" x 1/4"	3/8" x 3/8"	1/2" x 1/2"	3/4" x 3/4"	1" x 1"	1 1/4" x 1 1/4"	1 1/2" x 1 1/2"
⊗ NIPPLE-14	⊗ NIPPLE-38	⊗ NIPPLE-12	⊗ NIPPLE-34	⊗ NIPPLE-88	⊗ NIPPLE-141	⊗ NIPPLE-121

QUICK FIT-IN CONNECTOR

 10-4-2: 1/4" tube x 1/8" male 10-4-4: 1/4" tube x 1/4" male 10-4-4-O: 10-4-4 w/ O-ring  Male Straight 1/4" tube	 10-6-4: 3/8" tube x 1/4" male 10-6-8: 3/8" tube x 1/2" male  Male Straight 3/8" tube	 10-8-6: 1/2" tube x 3/8" male 10-8-8: 1/2" tube x 1/2" male  Male straight 1/2" tube	 10-0402: 1/8" male 10-0404: 1/4" male 10-0406: 3/8" male  Stem 1/4"
 10-0604: 1/4" male 10-0606: 3/8" male  Stem 3/8"	 15-4-4: 1/4" tube 15-4-6: 1/4" tube x 3/8" tube 15-6-6: 3/8" tube  Union Straight	 25-4-2: 1/4" tube x 1/8" female 25-4-4: 1/4" tube x 1/4" female 25-4-6: 1/4" tube x 3/8" female  Female Straight	 40-4-2: 1/4" tube x 1/8" male 40-4-2-O: 40-4-2 with O-ring 40-4-4: 1/4" tube x 1/4" male  Male Elbow 1/4" tube
 40-6-4: 3/8" tube x 1/4" male 40-6-6: 3/8" tube x 3/8" male  Male Elbow 3/8" tube	 40-8-6: 1/2" tube x 3/8" male 40-8-8: 1/2" tube x 1/2" male  Male Elbow 1/2" tube	 40-044: 1/4" tube x 1/4" stem 40-046: 1/4" tube x 3/8" stem 40-064: 3/8" tube x 1/4" stem 40-066: 3/8" tube x 3/8" stem  Elbow Stem 40	 50-4-4: 1/4" tube 50-4-6: 1/4" tube x 3/8" tube 50-6-6: 3/8" tube  Union Elbow
 60-4-4: 1/4" tube x 1/4" male 60-4-6: 1/4" tube x 3/8" tube 60-6-6: 3/8" tube x 3/8" male  Tee Central Male	 60-04: 1/4" tube x 1/4" stem 60-06: 3/8" tube x 3/8" stem  Tee Central Stem 60	 Y04: 1/4" tube Y06: 3/8" tube  Union Y	 70-4: 1/4" tube 70-6: 3/8" tube  Union Tee


Fittings , Quick Connectors , Nipples

موصلات سريعة

QUICK FIT-IN CONNECTOR

			
70-464: 1/4" tube x 3/8" tube 70-646: 3/8" tube x 1/4" tube	75-4-4: 1/4" tube x 1/4" male	70-044: 1/4" tube x 1/4" stem 70-066: 3/8" tube x 3/8" stem	CL-JG14: 1/4" CL-JG38: 3/8"
 Tee Tube	 tube x 1/4" male 3/8:75-6-4	 Tee Side Stem 70	 CL-JG

			
15-4-4D: 1/4" tube x 1/4" tube	0408: 1/4" tube x 1/2" threads 0608: 3/8" tube x 1/2" threads	254-716: 1/4" tube x 7/16" female 256-716: 3/8" tube x 7/16" female	Wrench for quick fit-in connectors
 Union Twin	 1/2" M&F Connector	 Faucet Connector 25	 WRS-JG3814


			
DCC-011A: 1/4" tube x 1/8" thread	DCC-018: 1/4" tube x 1/4" thread	DCC-015BB: 1/4" tube x 1/4" thread	DCC-014A: 1/4" tube x 1/4" tube DCC-014B: 1/4" tube x 1/4" tube DCC-014C: 3/8" tube x 3/8" tube
 Male Straight Adapter	 Elbow Female Adapter	 Lengthen Adapter	 Bulk Head Adapter

			
DCC-001A: 1/4" tube DCC-001B: 3/8" tube	DCC-020A: 1/4" tube x 1/8" thread DCC-020B: 1/4" tube x 1/4" thread	DCC-021: 1/4" x 1/4"	DCC-022: 1/4" tube x 1/4" tube
 Quick Adapter	 Check Valves Adapter	 Shut-off	 Low Pressure

	
DCC-023: 1/4" tube x 1/4" tube	DCC-020Y: 1/4" tube x 1/4" tube
 High Pressure	 Straight Female Adapter

Steel Mounting Brackets



			
SS Bracket for Faucet	SS Bracket for Single Housing	White or SS Bracket for AQF10/20 Housing	White or SS Bracket for Big Blue Housing
 BK-FT	 BK-1H-SS	 BK-1A (SS)	 BK-1BB (SS)

			
White or SS Bracket for 2 Housings	SS Bracket for Big Blue Housing	N type bracket for 2 Housings	Bracket for 2 or 3 NL filters
 BK-2HN (SS)	 BK-2HN-1	 BK-2HN-2	 BK-2NL (BK-3-NL)

			
Bracket for 2 Housings	White or SS bracket for 2 AQF housings	White or SS bracket for 2 BB housings	White stand for 2 BB10" housings
 BK-2-SS-R	 BK-2A (SS)	 BK-2BB (SS)	 BK-2BB-STAND-10

Steel Mounting Brackets

			
White stand for 2 BB20 [®] housings	N type Bracket for 3 Housings	White or SS, bracket for 3 housings	N bracket for 3 AQF housings
 BK-2BB-STAND-20	 BK-3HN	 BK-3HN-1 (SS)	 BK-3A-N

			
SS L type Bracket for 3 AQF Housings	Bracket for 3 Big Blue Housings	Bracket for 3 AQF Housing (ARO-150G USE)	Bracket for 3 AQF housings (AP-800-DIR USE)
 BK-3A-SS-L	 BK-3BB	 BK-3A-150	 BK-800DIR

		
Bracket for 4 stage RO (RO with pump)	Bracket for 5 stage RO (RO with pump)	Bracket for 5-7 stage stand RO
 BK-RO4 (BK-RO4P)	 BK-RO5 (BK-RO5P)	 RO Stand Bracket

Notes



MAXMEEN

Manameen for Desalination & Water Solution

مجموعة المنامين للتحلية وحلول المياه



✉ pure@manameen.com

🌐 www.maxmeen.com

📷 @Maxmeen_pure

📘 @Maxmeenpure

☎ 0598309005 / 0138309005

