

# Data-Sheet

---


## 16 Fiber MPO Trunk Cable Assembly

# 16 Fiber MPO LC Breakout Cable 16 MPO(F) - 8xLC

JTOPTICS breakout cable assemblies are composed of high quality OFNP jacketed fiber optic cables used in data center, telecom and backbone application for 400G / 800G connectivity.

16 Fiber MPO harness patch cord assemblies are used to interconnect QSFP-DD and QSFP-DD800 transceivers. QSFP-DD to 8 x SFP-56 and QSFP-DD800 to QSFP-28 with SR8 Transceiver Modules.

MPO cables are factory pre-terminated, tested and packed along with test reports. They are built with high-quality components of Japanese MT ferrules and JTOPTICS brand connector kits. The trunk cable assemblies are composed of high quality OFNP jacketed fiber optic cables

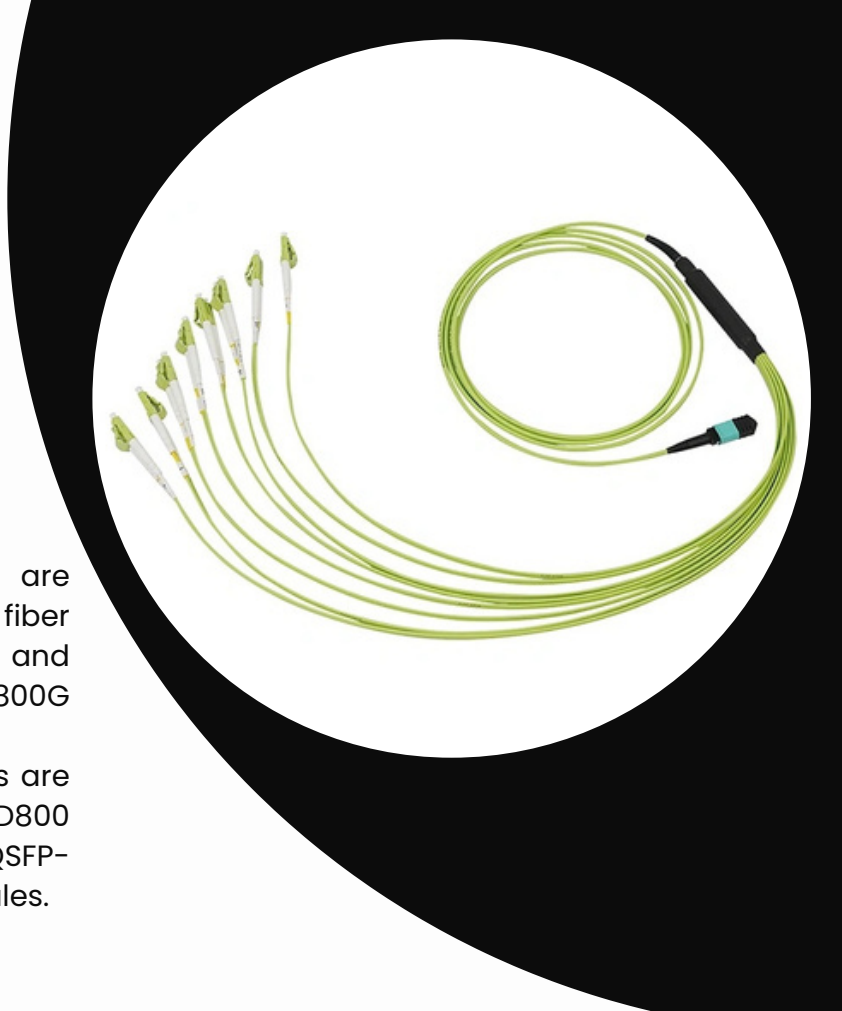

Low insertion loss 0.35dB for MPO

JTOPTICS MPO connector features the industry's highest-precision thermoplastic MT ferrule, designed to 0.35dB IL for elite. Standard loss 0.6dB.

## 100% 3D Interferometer Test


Besides insertion loss, 3D geometry data affects the performances for MPO cable assemblies. 3D control for MT ferrule is more complex than normal ceramic ferrule. JTOPTICS tests 3D 100% for all MPO cables strictly.



- High performance in IL & RL
- Low Insertion Loss
- 100% 3D Test
- Complied to ANSI/TIA-568-C.3, IEEE 802.3ba and adheres to ANSI/TIA-942
- Compliant for MPO/MTP interfaces



Name	16 Fiber Multi Mode OM4 MPO Breakout Cable	16 Fiber Multi Mode OM5 MPO Breakout Cable
<b>Part Code</b>	JTMP416MOSFLCPXX	JTMP516MOSFLCPXX
<b>Connector A</b>	MPO Female (16 Fiber)	MPO Female (16 Fiber)
<b>Connector B</b>	8 x LC UPC Duplex	8 x LC UPC Duplex
<b>Cable Jacket</b>	Plenum (OFNP)	Plenum (OFNP)
<b>Jacket OD</b>	3.0mm	3.0mm
<b>Fiber Count</b>	16 Fibers	16 Fibers
<b>Fiber Mode</b>	Multi mode (OM4 50/125μm)	Multi mode (OM5 50/125μm)
<b>Wavelength</b>	850/1550nm	850/1550nm
<b>MPO Insertion Loss</b>	0.3dB Max	0.3dB Max
<b>MPO Return Loss</b>	≥30dB	≥30dB
<b>LC Insertion Loss</b>	≤0.3dB	≤0.3dB
<b>LC Return Loss</b>	≥25dB	≥25dB
<b>Fan Out Cable Outer Diameter</b>	2.0mm	2.0mm
<b>Installation Tensile Load</b>	100 N	100 N
<b>Long-Term Tensile Load</b>	50 N	50 N
<b>Operating Temp Range</b>	-10°C to +70°C	-10°C to +70°C
<b>Storage Temp Range</b>	-40°C to +85°C	-40°C to +85°C
<b>Minimum Bend Radius</b>	30mm	30mm
<b>Polarity</b>	A polarity	A polarity
<b>Application</b>	QSFP-DD800 to QSFP-28 QSFP-DD to SFP56	QSFP-DD800 to QSFP-28 QSFP-DD to SFP56

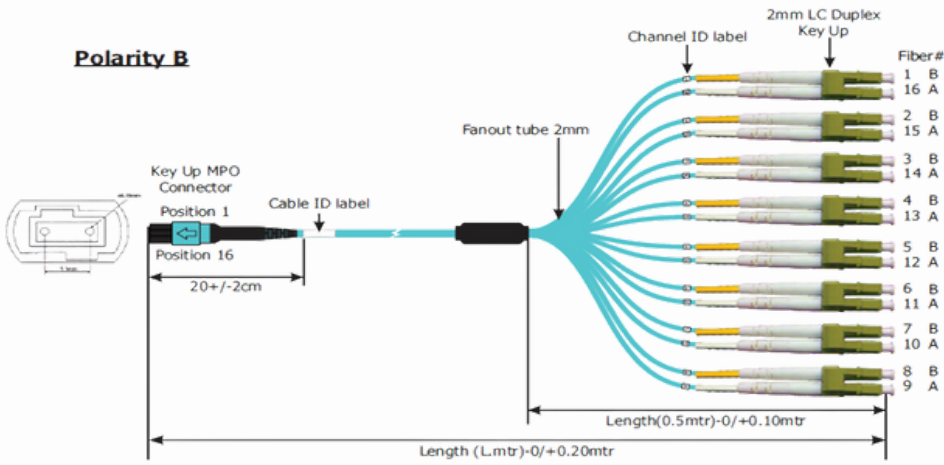

MTP is a registered trademark of US Connect, The MTP connector offers ferrule float to improve mechanical performance. MPO and MTP are 100% compatible.

\*\*Standard Breakout Length is 0.5 Meter for custom length contact sales team.



**IL and RL Testing**

Evaluate insertion loss and return loss of cables to ensure high-quality and stable signal transmission.

**Polarity Testing**

Measure the polarity to ensure data from Tx at one end can be properly transmitted to Rx at the other end via light signals.



**End-face Inspection**

Inspect the connector end face for scratches, defects and contamination to ensure reliable fiber connections.




**Optional Connector**

MPO Push-Pull Connector



MPO Flex-Boot Connector

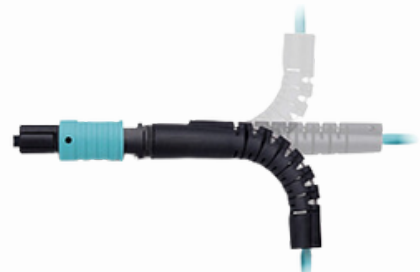

# About JT

In the dynamic realm of technology and innovation, the emergence of **Jayani Technologies Limited** has been nothing short of a saga marked by ingenuity, resilience, and a steadfast commitment to excellence. Originating as Jayani Technologies LLP in 2011 in the vibrant city of Mumbai, India, the company has evolved into a trailblazer in its domain. This narrative unfolds against the backdrop of the company's expansion into Hong Kong, a strategic move signaling its intent to conquer new horizons.

Established in 2011, Jayani Technologies (**JTOPTICS**<sup>®</sup>) was conceived as a response to the evolving technological landscape, recognizing the need for cutting-edge solutions that marry innovation with reliability. The Mumbai headquarters became the crucible for the company's early endeavor, a melting pot of talent and vision that propelled Jayani Technologies into the forefront of its industry and emerged as a leading manufacturer and supplier of cutting-edge solutions in the fields of optical Fiber, data center, networking, and electric vehicle components.

From its inception, the company distinguished itself by its unwavering commitment to client satisfaction, a commitment that became the cornerstone of its success. Jayani Technologies quickly became synonymous with technological prowess and an unwavering dedication to delivering solutions that transcended conventional boundaries.

JTOPTICS<sup>®</sup> has developed and produced many active and passive interconnection and connectivity products suitable for different networks, aiming to become a one-stop device integration solution provider in the open optical network field, products include MPO Cables, AOC cable, passive DAC cable, optical transceivers, optical modules & subsystems, active & passive optical components, and high-density cabling products.

## **Vision**

Our vision is to be recognized by clients as trustful a trusted business partner whose mission is to help our clients by offering state-of-the-art products and services.

## **Mission**

Our mission is to catalyze the success of its clients by providing unparalleled technological solutions. The company envisions itself as a catalyst for positive change, aiming to reshape industries through innovation, integrity, and a relentless pursuit of excellence.



# Our Clients

**ciena**

**ADVA**<sup>™</sup>  
Optical Networking

**colt**

**CISCO**

**Coriant**

**MAVENIR**



**इसरो isro**

**JUNIPER**  
NETWORKS

**TEJAS**<sup>®</sup>  
NETWORKS

**भारत इलेक्ट्रॉनिक्स**  
**BHARAT ELECTRONICS**

**HITACHI**

**एनटीपीसी**  
**NTPC**

**TATA**

**LARSEN & TOUBRO**





# Our Contact



+91-86-9309-9309



[info@jtoptics.com](mailto:info@jtoptics.com)



[www.jtoptics.com](http://www.jtoptics.com)



409-410 Lodha I-Think, B-Block, Palava,  
Dombivali (E), Thane, MH 421204

**Hongkong**

**India**

**Singapore**

**Malaysia**

**Qatar**

**JAYANI TECHNOLOGIES LLP**